# Suction cup U50-2 Nitrile-PVC, G1/4" male, with mesh filter

Article number: 0101818



- Suitable for objects with flat or slightly curved surfaces.
- Also used for concave objects.

| Tecl | nnica | l data |
|------|-------|--------|
|      |       |        |


| Description             | Unit            | Value   |
|-------------------------|-----------------|---|
| Suction cup shape       | -               | Universal                                       |
| Application             | -               | Dry sheet metal, Plastic injection molded parts |
| Suction cup design      | -               | Round   |
| Characteristics         | -               | Dry sheet metal, Plastic injection molded parts |
| Material                | -               | Nitrile-PVC (NPV)                               |
| Weight, min.            | g               | 10  |
| Suction cup model       | -               | U   |
| Volume                  | cm <sup>3</sup> | 12  |
| Height                  | mm              | 32.5  |
| Outer diameter, min.    | mm              | 51.4  |
| Fitting size            | -               | 1/4"  |
| Fitting option          | -               | Filter mesh                                     |
| Fitting style           | -               | Male  |
| Fitting type            | -               | G-thread  |
| Suction cup model       | -               | U50-2   |
| Movement, vertical max. | mm              | 6   |
| Curve radius, min.      | mm              | 35  |

## **Performance - Lifting forces**

| U50-2   | Vertical (N) | Parallel (N) |
|---------|--------------|--------------|
| 20 -kPa | 35           | 20           |
| 60 -kPa | 73           | 37           |
| 90 -kPa | 92           | 44           |

| Material               |                   |  |  |
|------------------------|-------------------|--|--|
| Name                   | Nitrile-PVC (NPV) |  |  |
| Colour                 | Black             |  |  |
| Temperature, min.   °C | 0                 |  |  |
| Temperature max.   °C  | 90                |  |  |
| Hardness   °Shore A    | 50                |  |  |
| Material resistance    |                   |  |  |
| Alcohol                | Good              |  |  |
| Concentrated acids     | Fair              |  |  |
| Ethanol                | n/a               |  |  |
| Hydrolysis             | Good              |  |  |
| Methanol               | n/a               |  |  |
| Oil                    | Excellent         |  |  |
| Oxidation              | Good              |  |  |
| Petrol                 | Excellent         |  |  |
| Wear resistance        | Excellent         |  |  |
| Weather and ozone      | Good              |  |  |

## **Dimensional drawings**

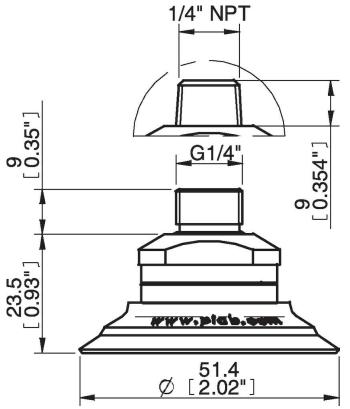

# Values specified in this data sheet are tested at (unless otherwise stated):

•Room temperature (20°C [68°F] ± 3°C [5.5°F]).

•Standard atmosphere (101.3 [29.9 inHg]  $\pm$  1.0 kPa [0.3 inHg]).

•Relative humidity 20-70%.

•Compressed air quality, DIN ISO 8573-1 class 4.

#### Accessories

0100262 | Fitting 5x1/8" NPSF female, 50 0101151 | Suction cup U50-2 Silicone 0101154 | Fitting 1/8" NPSF female, 50, with mesh filter 0200715 | Fitting G1/8" male, 50, with mesh filter 3150198 | Fitting 1/8" NPSF female, 50, PA 3250017 | Fitting 1/8" NPSF female, 50 3250087 | Fitting G3/8" male, 50, with mesh filter 3250090 | Fitting 3/8" NPT male, with mesh filter 3250094 | Fitting 1/4" NPT male, with mesh filter 3251012 | Fitting 1/4" NPSF female, 50, with dual flow control valve 3251013 | Fitting G1/4" male, with mesh filter and dual flow control valve 3251014 | Fitting 1/4" NPT male, with dual flow control valve 3251015 | Fitting G3/8" male, 50, with mesh filter and dual flow control valve 3251015 | Fitting G3/8" male, 50, with mesh filter and dual flow control valve 3251016 | Fitting 3/8" NPT male, with dual flow control valve 3251017 | Fitting 5x1/8" NPSF female, 50, with dual flow control valve

### Spare parts

0101150 | Suction cup U50-2 Nitrile-PVC 3250092 | Fitting G1/4" male, 50, with mesh filter