### Datasheet

## **Suction cup B75 Silicone**

Article number: 3150107S



- Suitable for level adjustment. Several short bellows in one lifting device can handle objects with height differences and varying shapes, for example embossed or corrugated plates.
- The lifting movement can be used to separate small and thin objects.
- Only lightweight objects should be handled when the lifting force is parallel to the surface of the object, in order to achieve good precision and safe lifting movement.

#### **Technical data**

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Dry sheet metal, Plastic injection molded parts
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Plastic injection molded parts
Material	-	Silicone (SIL)
Weight, min.	g	37
Suction cup model	-	В
Volume	cm <sup>3</sup>	110
Height	mm	37.3
Outer diameter, min.	mm	82.2
Outer diameter, actuated	mm	88.7
Fitting size	-	None
Fitting option	-	None
Fitting style	-	None
Fitting type	-	None
Suction cup model	-	B75
Movement, vertical max.	mm	24
Curve radius, min.	mm	40

#### **Performance - Lifting forces**

· · · · · · · · · · · · · · · · · · ·				
B75	Vertical (N)	Parallel (N)		
20 -kPa	74	62.4		
60 -kPa	167	122.4		
90 -kPa	226	154.1		

#### **Material**

Petrol

Name	Silicone, SIL 50° Shore A			
Colour	Red			
Temperature, min.   °C	-40			
Temperature max.   °C	200			
Hardness   °Shore A	50			
Material resistance				
Alcohol	Good			
Concentrated acids	Poor			
Ethanol	n/a			
Hydrolysis	Fair			
Methanol	n/a			
Oil	Poor			
Oxidation	Excellent			

Poor


Good

Excellent

#### **Dimensional drawings**

Wear resistance

Weather and ozone

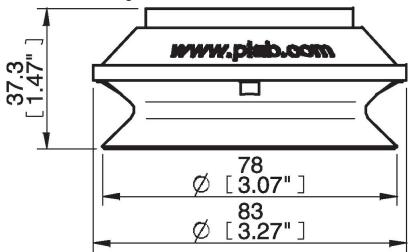

# Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

#### **Accessories**

0100548 | Fitting 75, 1/8" NPSF female, with mesh filter

0100551 | Fitting 75, G3/8" female, with mesh filter

0100553 | Fitting 75, 3/8" NPSF female, with mesh filter

0100555 | Fitting 75, G1/2" female, with mesh filter

0127819 | Fitting 1/8" NPSF female AI, with mesh filter

0127820 | Fitting G1/2" female Al, with mesh filter

0127821 | Fitting 1/4" NPT female Al, with mesh filter & 10-32 addl. conn.