


Solenoid valve DS 23 for control ON/OFF

Article number: 0104274

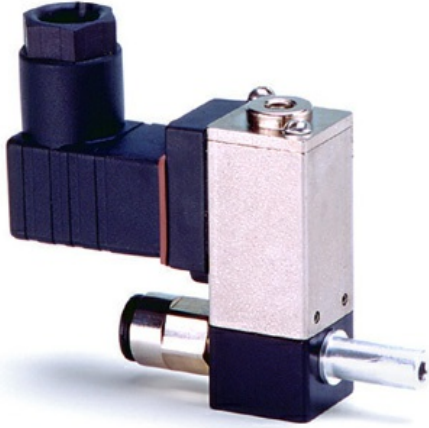

- Electric 3/2 valve with manual override.
- Quick and easy mounting with push-in connections.
- Body with 3 M5 ports.
- Suitable for compressed air, filtration 40µ.

Technical data

Description	Unit	Value
Material	-	Al, CuZn, Nitrile (NBR), Nickel, POM, SS
Temperature, max.	°C	50
Temperature, min.	°C	-18
Weight, min.	g	100
Display	-	LED indicator
Feed pressure, max.	MPa	0.6
Feed pressure, min.	MPa	0.2
Flow (@ P1=6 bar and Δp=1 bar)	NI/s	1.3
Safety classification	-	IP65
Voltage	VDC	24 (22-28)
Valve function	-	NC
Current, consumption	mA	100
Life span	cycles	100000000
Height	mm	57.3
Length	mm	15.9
Width	mm	49.7
Load time rating	%	100

Dimensional drawings

