


# Quick connect module G3/8", 2 pos

Article number: 0212316

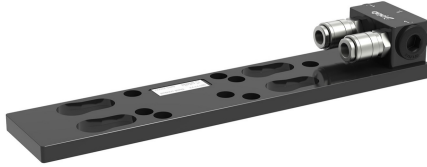

- Common compressed feed port reduces cost of installation and shorted installation time
- Easy to remove, easy to service individual piCOMPACT®23 SMART when mounted in stack.
- Secure installation.
- Available for 1-4 units

## Technical data

Description	Unit	Value
Material	-	Al, CuZn, Nitrile (NBR), PA, SS
Temperature, max.	°C	50
Temperature, min.	°C	-10
Weight, max.	g	408
Feed pressure, max.	MPa	0.7

## Dimensional drawings

