### Datasheet

# Suction cup VL25BX, G1/4"-G1/8"

### Article number: 0202695



- Suitable for level adjustment.
- Several short bellows in one lifting device can handle objects with height differences and varying shapes, for example embossed or corrugated plates
- The lifting movement can be used to separate small and thin objects
- Only light weight objects should be handled when the lifting force is parallel to the surface of the object in order to achieve good precision and safe lifting movement
- Volume discounts available for big packs from 30-99 pieces with an even larger discount for big packs of 100 pieces and above
- PVC-free recycable material

#### **Technical data**


Description	Unit	Value
Suction cup shape	-	Bellows
Suction cup design	-	Round
Material	-	TPE
Suction cup model	-	BX-P
Height (B)	mm	22.3
Height 2 (D)	mm	9
Inner diameter (C)	mm	6
Outer diameter, min. (A)	mm	25
Fitting size	-	1/4", 1/8"
Fitting option	-	None
Fitting style	-	Female/Male
Fitting type	-	G-thread
Suction cup model	-	VL25BX TPE-U

#### **Performance - Lifting forces**

VL25BX TPE-U	Vertical (N)	Parallel (N)
50 -kPa	12 N	

Material	
Name	TPE-U
Colour	Purple
Temperature, min.   °C	0
Temperature max.   °C	60
Hardness   °Shore A	65
Material resistance	
Alcohol	n/a
Concentrated acids	n/a
Ethanol	n/a
Hydrolysis	n/a

nyaroiysis	1/a
Methanol	n/a
Oil	n/a
Oxidation n	n/a
Petrol n	n/a
Wear resistance n	n/a
Weather and ozone n	n/a

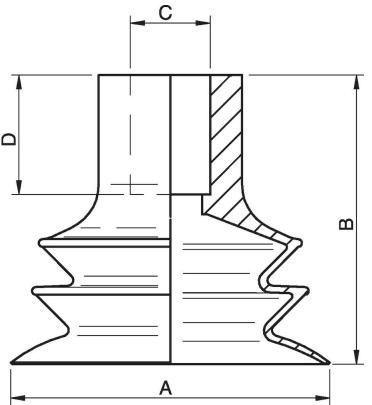

## Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg]  $\pm$  1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

#### Accessories

0202156 | Fitting VL D=Ø6, G1/8" - M5 0202160 | Fitting VL D=Ø6, 1/8" NPT - M5 0202161 | Fitting VL D=Ø6, 1/4" NPT - 1/8" NPSF

#### Spare parts

0202157 | Fitting VL D=Ø6, G1/4" - G1/8" 0202110 | Suction cup VL25BX