


Suction cup F110 Nitrile-PVC with washer

Article number: 3150038P

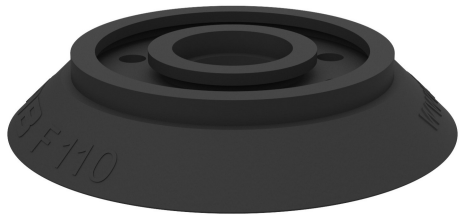

- Suitable for flat objects.
- Good stability and little inherent movement.
- Recommended when the lifting force is parallel to the surface of the object.
- Cleats prevent thin, sensitive objects from being deformed and gives extra friction when the lifting force is parallel.

Technical data

Description	Unit	Value
Suction cup shape	-	Flat
Application	-	Dry sheet metal
Suction cup design	-	Round
Characteristics	-	Dry sheet metal
Material	-	Nitrile-PVC (NPV)
Weight, min.	g	66
Suction cup model	-	F
Volume	cm ³	70
Height	mm	20
Outer diameter, min.	mm	112
Fitting size	-	None
Fitting option	-	None
Fitting style	-	None
Fitting type	-	None
Suction cup model	-	F110
Movement, vertical max.	mm	4
Curve radius, min.	mm	250

Performance - Lifting forces

F110	Vertical (N)	Parallel (N)
20 -kPa	140	140
60 -kPa	420	250
90 -kPa	560	300

Material

Name	Nitrile-PVC (NPV)
Colour	Black
Temperature, min. °C	0
Temperature max. °C	90
Hardness °Shore A	50

Material resistance

Alcohol	Good
Concentrated acids	Fair
Ethanol	n/a
Hydrolysis	Good
Methanol	n/a
Oil	Excellent
Oxidation	Good
Petrol	Excellent
Wear resistance	Excellent

Weather and ozone


Good

Name

Nitrile-PVC (NPV)

Dimensional drawings

Black

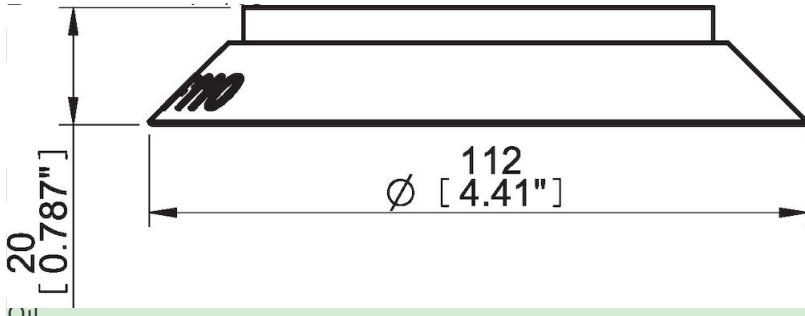

0

90

50

Good

Fair

n/a

Good

n/a

Oil

Excellent

Values specified in this data sheet are tested at (unless

Good

otherwise stated):

Excellent

Wear resistance

Excellent

Weather and ozone

Good

•Room temperature (20°C [68°F] ± 3°C [5.5°F]).

•Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).

•Relative humidity 20-70%.

•Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

- 0100557 | Fitting 110 G3/8" female, with mesh filter
- 0100559 | Fitting 110, 3/8" NPSF female, with mesh filter
- 0100561 | Fitting 110, G1/2" female, with mesh filter
- 0100563 | Fitting 110, G1/2" female, with cone valve
- 3250007 | Fitting G1/2" female AI, with mesh filter