


# COAX® in piGRIP® Si

Article number: 0200345



- Fully decentralized vacuum unit based on patented COAX® technology.
- Quickest response time and very high energy efficiency.
- Easy system dimensioning – small risk for mistakes.
- Available with a variation of two-stage COAX® MICRO cartridges.
- Suitable for high vacuum flow.
- Suitable for extra capacity/dirt tolerance.

## Technical data

Description	Unit	Value
Material	-	Al, CuZn, Nitrile (NBR), PA
Temperature, max.	°C	80
Temperature, min.	°C	-10
Weight, min.	g	45
Feed pressure, max.	MPa	0.7
Noise level, max.	dBA	61
Noise level, min.	dBA	55


## Performance

Feed pressure MPa	Air consumption NI/s	Vacuum flow (NI/s) at different vacuum levels (-kPa)														Max vacuum kPa
		0	10	20	30	40	50	60	70	75	80	90	95	99		
0.6	0.12	0.28	0.21	0.12	0.08	0.07	0.06	0.04	0.02	0	0	0	0	0	0	≥75

Feed pressure MPa	Air consumption NI/s	Evacuation time (s/l) to reach different vacuum levels (-kPa)														Max vacuum kPa
		10	20	30	40	50	60	70	80	90	95	99	99.5	100.3		
0.6	0.12	0.41	1.01	2.01	3.3	4.9	6.9	10.2	0	0	0	0	0	0	≥75	

Feed pressure MPa	Air consumption NI/s	Blow flow (NI/s) at different pressure levels (-kPa)														Max pressure kPa
		0	10	20	30	40	50	60	70	80	90	100	110	120	130	
0.6	0.12	0.4	0.34	0.22	0.21	0.2	0.18	0.17	0.15	0	0	0	0	0	0	≥75

## Dimensional drawings

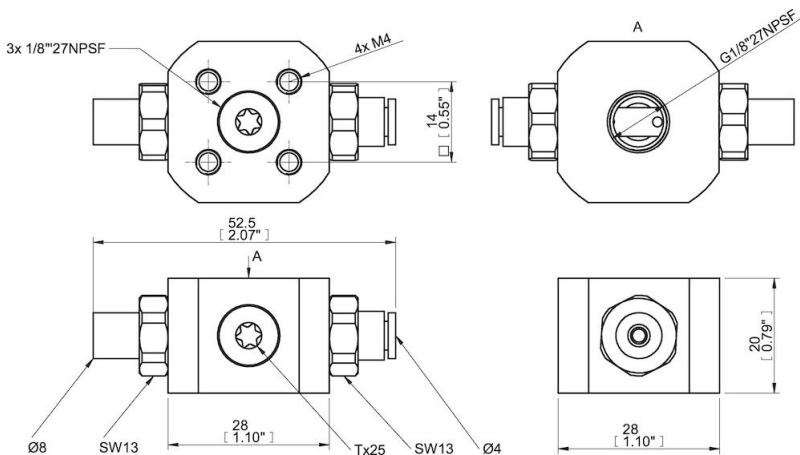

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Compressed air quality, DIN ISO 8573-1 class 4.

**Accessories**

0106915 | Mounting kit 4xM4 VGS3010

0106927 | Mounting kit M8/16 VGS3010

0106949 | Mounting kit M8/27 04 VGS3010

0108488 | Mounting kit M6/22 07 top VGS3010