Datasheet

Suction cup U50-2 Silicone FCM, G1/4" male, with mesh filter

Article number: 9909725



- The silicone material complies with FDA 21 CFR 177.2600 & EU 1935/2004.
- Suitable for objects with flat or slightly curved surfaces
- Also used for concave objects.

Technical data

Description	Unit	Value
Suction cup shape	-	Universal
Application	-	Food contact materials (FDA & EU), non-detectable
Suction cup design	-	Round
Characteristics	-	Food contact materials (FDA & EU), non-detectable
Material	-	Silicone (SIL)
Weight, min.	g	10
Suction cup model	-	U
Volume	cm³	12
Height	mm	22.5
Outer diameter, min.	mm	51.4
Fitting size	-	1/4"
Fitting option	-	Filter mesh
Fitting style	-	Male
Fitting type	-	G-thread
Suction cup model	-	U50-2
Movement, vertical max.	mm	6
Curve radius, min.	mm	35

Performance - Lifting forces

U50-2	Vertical (N)	Parallel (N)
20 -kPa	35	20
60 -kPa	73	37
90 -kPa	92	44

Material


Name	Silicone (SIL FDA) 50° Shore			
Colour	Transparent			
Temperature, min. °C	-40			
Temperature max. °C	200			
Hardness °Shore A	50			
Material resistance				
Alcohol	Good			
Concentrated acids	Poor			
Ethanol	n/a			
Hydrolysis	Fair			
Methanol	n/a			
Oil	Poor			
Oxidation	Excellent			
Petrol	Poor			

Good

Excellent

Dimensional drawings

Wear resistance Weather and ozone

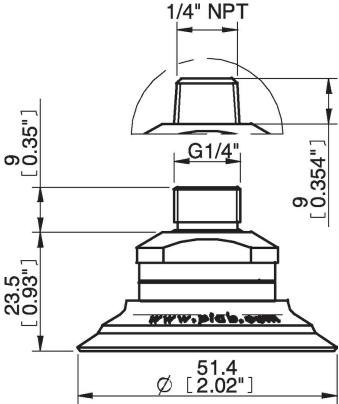

Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] \pm 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg] \pm 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

0101154 | Fitting 1/8" NPSF female, 50, with mesh filter 3250094 | Fitting 1/4" NPT male, with mesh filter

Spare parts

0200443 | Suction cup U50-2 Silicone FCM 3250092 | Fitting G1/4" male, 50, with mesh filter