### Datasheet

## Suction cup B75 HNBR with washer

### Article number: 3150034T



- Suitable for level adjustment. Several short bellows in one lifting device can handle objects with height differences and varying shapes, for example embossed or corrugated plates.
- The lifting movement can be used to separate small and thin objects.
- Only lightweight objects should be handled when the lifting force is parallel to the surface of the object, in order to achieve good precision and safe lifting movement.


Technical data				
Description	Unit	Value		
Suction cup shape	-	Bellows		
Application	-	Dry sheet metal, Glass handling, High/low temp cup (plastic), Plastic injection molded parts, Mark Free		
Suction cup design	-	Round		
Characteristics	-	Dry sheet metal, Glass handling, High/low temp cup (plastic), Plastic injection molded parts, Mark free		
Material	-	HNBR		
Weight, min.	g	46		
Suction cup model	-	В		
Volume	cm <sup>3</sup>	110		
Height	mm	37.3		
Outer diameter, min.	mm	78		
Fitting size	-	None		
Fitting option	-	Washer		
Fitting style	-	None		
Fitting type	-	None		
Suction cup model	-	B75		
Movement, vertical max.	mm	24		
Curve radius, min.	mm	40		

#### **Performance - Lifting forces**

B75	Vertical (N)	Parallel (N)
20 -kPa	74	62.4
60 -kPa	167	122.4
90 -kPa	226	154.1

Material	
Name	HNBR 75° Shore A
Colour	Blue/grey
Temperature, min.   °C	-30
Temperature max.   °C	140
Hardness   °Shore A	75
Material resistance	
Alcohol	Good
Concentrated acids	Fair
Ethanol	n/a
Hydrolysis	Good
Methanol	n/a
Oil	Excellent
Oxidation	Excellent
Petrol	Excellent
Wear resistance	Excellent
Weather and ozone	Excellent

#### **Dimensional drawings**

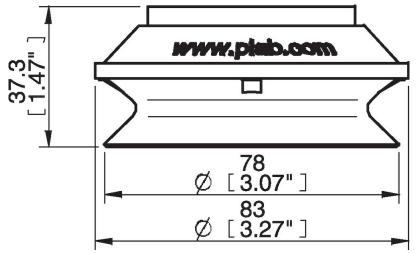

# Values specified in this data sheet are tested at (unless otherwise stated):

•Room temperature (20°C [68°F] ± 3°C [5.5°F]).

•Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).

•Relative humidity 20-70%.

•Compressed air quality, DIN ISO 8573-1 class 4.

#### Accessories

0100548 | Fitting 75, 1/8" NPSF female, with mesh filter

0100551 | Fitting 75, G3/8" female, with mesh filter

0100553 | Fitting 75, 3/8" NPSF female, with mesh filter

0100555 | Fitting 75, G1/2" female, with mesh filter

0127819 | Fitting 1/8" NPSF female Al, with mesh filter

0127820 | Fitting G1/2" female Al, with mesh filter

0127821 | Fitting 1/4" NPT female AI, with mesh filter & 10-32 addl. conn.