## Suction cup VL60BX, 1/4"NPT-1/8"NPSF

Article number: 0202744



- Suitable for level adjustment.
- Several short bellows in one lifting device can handle objects with height differences and varying shapes, for example embossed or corrugated plates
- The lifting movement can be used to separate small and thin objects
- Only light weight objects should be handled when the lifting force is parallel to the surface of the object in order to achieve good precision and safe lifting movement
- Volume discounts available for big packs from 30-99 pieces with an even larger discount for big packs of 100 pieces and above

TPE-U

PVC-free recycable material

#### **Technical data**

Description	Unit	Value
Suction cup shape	-	Bellows
Suction cup design	-	Round
Material	-	TPE
Suction cup model	-	BX-P
Height (B)	mm	52.2
Height 2 (D)	mm	18
Inner diameter (C)	mm	12
Outer diameter, min. (A)	mm	58
Fitting size	-	1/4", 1/8"
Fitting option	-	None
Fitting style	-	Female/Male
Fitting type	-	NPT-thread, NPSF-thread
Suction cup model	-	VL60BX TPE-U


## **Performance - Lifting forces**

VL60BX TPE-U	Vertical (N)	Parallel (N)
50 -kPa	60 N	

#### **Material** Name

Colour	Purple
Temperature, min.   °C	0
Temperature max.   °C	60
Hardness   °Shore A	65
Material resistance	
Alcohol	n/a
Concentrated acids	n/a
Ethanol	n/a
Hydrolysis	n/a
Methanol	n/a
Oil	n/a
Oxidation	n/a
Petrol	n/a
Wear resistance	n/a
Weather and ozone	n/a

## **Dimensional drawings**

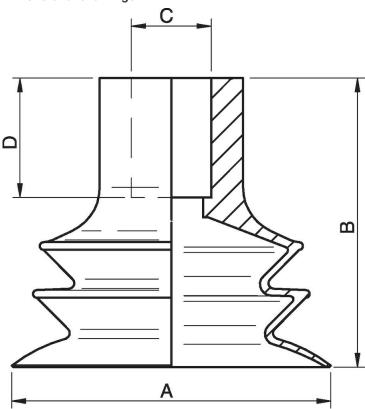

# Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg]  $\pm$  1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

#### Accessories

0202159 | Fitting VL D=Ø12, G1/4" - G1/8" 0202165 | Fitting VL D=Ø12, G3/8" - G1/4" 0202167 | Fitting VL D=Ø12, 3/8" NPT - 1/4" NPSF

## **Spare parts**

0202163 | Fitting VL D=Ø12, 1/4"NPT - 1/8"NPSF 0202115 | Suction cup VL60BX