### Datasheet

# Suction cup B50-2 Nitrile-PVC with filter, G1/4" male, with dual flow control valve and mesh filter

Article number: 0101677



- Suitable for level adjustment. Several short bellows in one lifting device can handle objects with height differences and varying shapes, for example embossed or corrugated plates.
- Lifting movement to separate small and thin objects.
- Only lightweight objects should be handled when the lifting force is parallel to the surface of the object, in order to achieve good precision and safe lifting movement.
- With mesh filter.

#### **Technical data**

i ecililicai data		
Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Dry sheet metal, Plastic injection molded parts
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Plastic injection molded parts
Material	-	Nitrile-PVC (NPV)
Weight, min.	g	20
Suction cup model	-	В
Volume	cm <sup>3</sup>	32
Leakage flow, max.	NI/s	0.16
Height	mm	50.4
Outer diameter, min.	mm	52.5
Outer diameter, actuated	mm	59
Fitting size	-	1/4"
Fitting option	-	Dual flow control valve, Filter disc, Filter mesh
Fitting style	-	Male
Fitting type	-	G-thread
Valve restriction	mm	1
Suction cup model	-	B50-2
Movement, vertical max.	mm	12.4
Curve radius, min.	mm	30

#### **Performance - Lifting forces**

B50-2	Vertical (N)	Parallel (N)
20 -kPa	33	24.2
60 -kPa	65	51.2
90 -kPa	82	60.8

#### **Material**


Name	Nitrile-PVC (NPV)			
Colour	Black			
Temperature, min.   °C	0			
Temperature max.   °C	90			
Hardness   °Shore A	50			
Material resistance				
Alcohol	Good			
Concentrated acids	Fair			
Ethanol	n/a			
Hydrolysis	Good			
Methanol	n/a			
Oil	Excellent			
Oxidation	Good			
Petrol	Excellent			

Excellent Good

#### **Dimensional drawings**

Wear resistance

Weather and ozone

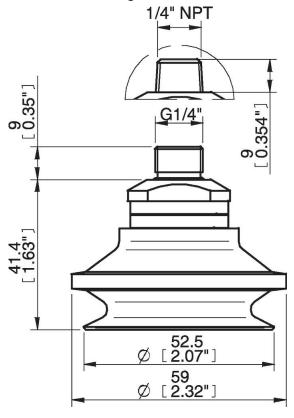

## Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F]  $\pm$  3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg]  $\pm$  1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

#### **Accessories**

0100262 | Fitting 5x1/8" NPSF female, 50

0101110 | Suction cup B50-2 Silicone with filter

0101154 | Fitting 1/8" NPSF female, 50, with mesh filter

0104655 | Filter D=54, 20 pcs, for B50-2

0200715 | Fitting G1/8" male, 50, with mesh filter

3150198 | Fitting 1/8" NPSF female, 50, PA

3250017 | Fitting 1/8" NPSF female, 50

3250087 | Fitting G3/8" male, 50, with mesh filter

3250090 | Fitting 3/8" NPT male, with mesh filter

3250092 | Fitting G1/4" male, 50, with mesh filter

3250094 | Fitting 1/4" NPT male, with mesh filter

3251012 | Fitting 1/8" NPSF female, 50, with dual flow control valve

3251014 | Fitting 1/4" NPT male, with dual flow control valve

3251015 | Fitting G3/8" male, 50, with mesh filter and dual flow control valve

3251016 | Fitting 3/8" NPT male, with dual flow control valve

3251017 | Fitting 5x1/8" NPSF female, 50, with dual flow control valve

#### Spare parts

0101109 | Suction cup B50-2 Nitrile-PVC with filter

3251013 | Fitting G1/4" male, with mesh filter and dual flow control valve

