Datasheet

Suction cup VL30FC, 1/8"NPT-M5

Article number: 0202704



- Suitable for flat or slightly corrugated or curved surfaces
- Good stability and little inherent movement
- Recommended when the lifting force is parallel to the surface of the object
- Cleats prevent thin, sensitive objects from being deformed and gives extra friction when the lifting force is parallel
- Volume discounts available for big packs from 30-99 pieces with an even larger discount for big packs of 100 pieces and above

TPE-U

Purple

0

60

65

- •
- PVC-free recycable material


Technical data				
Description	Unit	Value		
Suction cup shape	-	Flat Concave		
Suction cup design	-	Round		
Material	-	TPE		
Suction cup model	-	FC		
Height (B)	mm	17.5		
Height 2 (D)	mm	9		
Inner diameter (C)	mm	6		
Outer diameter, min. (A)	mm	30		
Fitting size	-	1/8", M5		
Fitting option	-	None		
Fitting style	-	Female/Male		
Fitting type	-	NPT-thread, M-thread		
Suction cup model	-	VL30FC TPE-U		

Performance - Lifting forces

VL30FC TPE-U	Vertical (N)	Parallel (N)
50 -kPa	23 N	

Material Name Colour Temperature, min. | °C Temperature max. | °C Hardness | °Shore A Material resistance

Alcohol	n/a
Concentrated acids	n/a
Ethanol	n/a
Hydrolysis	n/a
Methanol	n/a
Oil	n/a
Oxidation	n/a
Petrol	n/a
Wear resistance	n/a
Weather and ozone	n/a

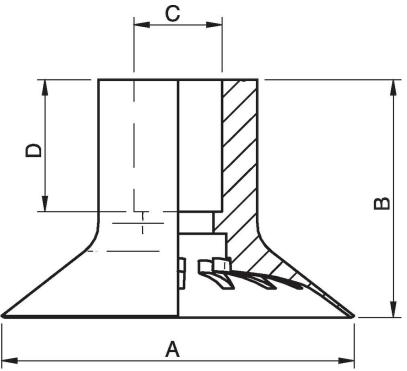

Values specified in this data sheet are tested at (unless otherwise stated):

•Room temperature (20°C [68°F] ± 3°C [5.5°F]).

•Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).

•Relative humidity 20-70%.

•Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

0202156 | Fitting VL D=Ø6, G1/8" - M5 0202157 | Fitting VL D=Ø6, G1/4" - G1/8" 0202161 | Fitting VL D=Ø6, 1/4" NPT - 1/8" NPSF

Spare parts

0202099 | Suction cup VL30FC 0202160 | Fitting VL D=Ø6, 1/8" NPT - M5