### Datasheet

# Suction cup F50-2 Nitrile-PVC, G3/8" male, with mesh filter and dual flow control valve

Article number: 0101776



- Suitable for flat objects.
- Good stability and little inherent movement.
- Recommended when the lifting force is parallel to the surface of the object.
- Cleats prevent thin, sensitive objects from being deformed and gives extra friction when the lifting force is parallel.

#### **Technical data**

Description	Unit	Value
Suction cup shape	-	Flat
Application	-	Dry sheet metal
Suction cup design	-	Round
Characteristics	-	Dry sheet metal
Material	-	Nitrile-PVC (NPV)
Weight, min.	g	14
Suction cup model	-	F
Volume	cm³	10
Leakage flow, max.	NI/s	0.16
Height	mm	33.5
Outer diameter, min.	mm	53
Outer diameter, actuated	mm	54.6
Fitting size	-	3/8"
Fitting option	-	Dual flow control valve, Filter mesh
Fitting style	-	Male
Fitting type	-	G-thread
Valve restriction	mm	1
Suction cup model	-	F50-2
Movement, vertical max.	mm	2.2
Curve radius, min.	mm	55

#### **Performance - Lifting forces**

F50-2	Vertical (N)	Parallel (N)
20 -kPa	36	24
60 -kPa	74	40
90 -kPa	96	50

#### **Material**


Name	Nitrile-PVC (NPV)			
Colour	Black			
Temperature, min.   °C	0			
Temperature max.   °C	90			
Hardness   °Shore A	50			
Material resistance				
Alcohol	Good			
Concentrated acids	Fair			
Ethanol	n/a			
Hydrolysis	Good			
Methanol	n/a			
Oil	Excellent			
Oxidation	Good			
Petrol	Excellent			

Excellent

Good

#### **Dimensional drawings**

Wear resistance Weather and ozone

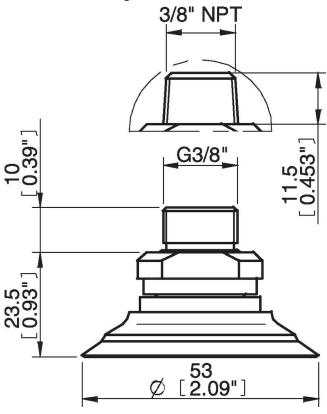

## Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F]  $\pm$  3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg]  $\pm$  1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

#### **Accessories**

0100262 | Fitting 5x1/8" NPSF female, 50

0101138 | Suction cup F50-2 Silicone

0101154 | Fitting 1/8" NPSF female, 50, with mesh filter

0101157 | Fitting 1/8" NPSF female, 50, with cone valve

0108166 | Suction cup F50-2 HNBR

3150198 | Fitting 1/8" NPSF female, 50, PA

3250017 | Fitting 1/8" NPSF female, 50

3250087 | Fitting G3/8" male, 50, with mesh filter

3250090 | Fitting 3/8" NPT male, with mesh filter

3250092 | Fitting G1/4" male, 50, with mesh filter

3250094 | Fitting 1/4" NPT male, with mesh filter

3251012 | Fitting 1/8" NPSF female, 50, with dual flow control valve

3251013 | Fitting G1/4" male, with mesh filter and dual flow control valve

3251014 | Fitting 1/4" NPT male, with dual flow control valve

3251016 | Fitting 3/8" NPT male, with dual flow control valve

3251017 | Fitting 5x1/8" NPSF female, 50, with dual flow control valve

3150241P | Suction cup F50-2 Nitrile-PVC, for fitting with cone valve

3150241S | Suction cup F50-2 Silicone, for fitting with cone valve

#### **Spare parts**

0101137 | Suction cup F50-2 Nitrile-PVC

3251015 | Fitting G3/8" male, 50, with mesh filter and dual flow control valve

