### Datasheet

# Suction cup VL60FC, 3/8"NPT-1/4"NPSF

### Article number: 0202741



- Suitable for flat or slightly corrugated or curved surfaces
- Good stability and little inherent movement
- Recommended when the lifting force is parallel to the surface of the object
- Cleats prevent thin, sensitive objects from being deformed and gives extra friction when the lifting force is parallel
- Volume discounts available for big packs from 30-99 pieces with an even larger discount for big packs of 100 pieces and above
- •
- PVC-free recycable material


Technical data				
Description	Unit	Value		
Suction cup shape	-	Flat Concave		
Suction cup design	-	Round		
Material	-	TPE		
Suction cup model	-	FC		
Height (B)	mm	35.5		
Height 2 (D)	mm	18		
Inner diameter (C)	mm	12		
Outer diameter, min. (A)	mm	60		
Fitting size	-	3/8", 1/4"		
Fitting option	-	None		
Fitting style	-	Female/Male		
Fitting type	-	NPT-thread, NPSF-thread		
Suction cup model	-	VL60FC TPE-U		

#### **Performance - Lifting forces**

VL60FC TPE-U	Vertical (N)	Parallel (N)
50 -kPa	79 N	

Material

Name	TPE-U
Colour	Purple
Temperature, min.   °C	0
Temperature max.   °C	60
Hardness   <sup>o</sup> Shore A	65
Material resistance	
Alcohol	n/a
Concentrated acids	n/a
Ethanol	n/a
Hydrolysis	n/a
Methanol	n/a
Oil	n/a
Oxidation	n/a
Petrol	n/a
Wear resistance	n/a
Weather and ozone	n/a

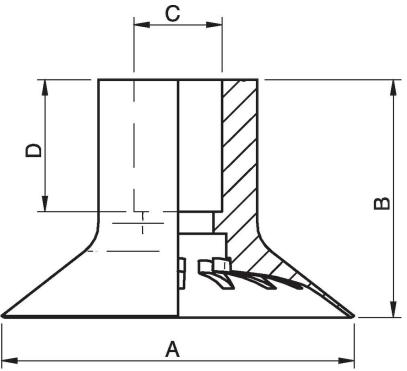

## Values specified in this data sheet are tested at (unless otherwise stated):

•Room temperature (20°C [68°F] ± 3°C [5.5°F]).

- •Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

#### Accessories

0202159 | Fitting VL D=Ø12, G1/4" - G1/8" 0202165 | Fitting VL D=Ø12, G3/8" - G1/4" 0202163 | Fitting VL D=Ø12, 1/4"NPT - 1/8"NPSF

#### Spare parts

0202102 | Suction cup VL60FC 0202167 | Fitting VL D=Ø12, 3/8" NPT - 1/4" NPSF