Datasheet

XLF300 Extra Large Flat cup, G1/2" female

Article number: 0127134



- Suitable for handling large and heavy sheets, such as glass and metal, with a flat or slightly concave surface.
- Friction pattern increases safety and capabillity to handle tilted or standing glass/metal sheets.
- Double lip design increases safety against overload or tear on the outer lip.
- Durable and abrasive resistant material reduces the risk for marks.
- Flat mounting plate facilitates customized mounting interfaces.
- Auxiliary port, suitable for vacuum sensing or efficient blow-off/release.

Technical data

Description	Unit	Value
Description	Offic	
Suction cup shape	-	Flat
Application	-	Dry sheet metal, Glass handling, Mark Free
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Glass handling, Mark free
Material	-	Nitrile-PVC (NPV) 60°
Weight, min.	g	2035
Suction cup model	-	XLF
Volume	cm³	666
Height	mm	27
Outer diameter, min.	mm	304
Outer diameter, actuated	mm	309.3
Fitting size	-	1/2"
Fitting option	-	None
Fitting style	-	Female
Fitting type	-	G-thread
Suction cup model	-	XLF300 Inner lip
Movement, vertical max.	mm	8
Curve radius, min.	mm	1900
Suction cup model	-	XLF300 Outer lip
Movement, vertical max.	mm	8
Curve radius, min.	mm	1900

Performance - Lifting forces

XLF300 Inner lip	Vertical (N)	Parallel (N)			
40 -kPa	2060	1751			
60 -kPa	3078	2616			
90 -kPa	4492	3903			
XLF300 Outer lip					
40 -kPa	2633	2238			
60 -kPa	3752	3189			
90 -kPa	5423	4609			

Material

Name


Colour	Black			
Temperature, min. °C	0			
Temperature max. °C	90			
Hardness °Shore A	60			
Material resistance				
Alcohol	Good			
Concentrated acids	Fair			
Ethanol	n/a			
Hydrolysis	Good			
Methanol	n/a			
Oil	Excellent			
Oxidation	Good			
Petrol	Excellent			
Wear resistance	Excellent			

Nitrile-PVC (NPV)

Good

Dimensional drawings

Weather and ozone

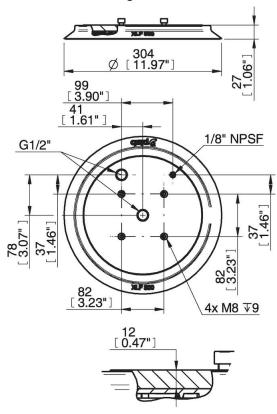

Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] \pm 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg] \pm 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.