


# Quick connect module G3/8", 3 pos

Article number: 0212317

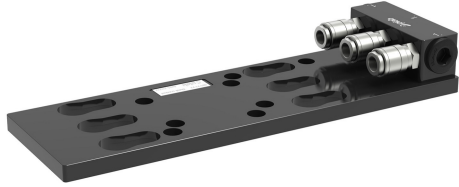

- Common compressed feed port reduces cost of installation and shorted installation time
- Easy to remove, easy to service individual piCOMPACT®23 SMART when mounted in stack.
- Secure installation.
- Available for 1-4 units

## Technical data

| Description         | Unit | Value                           |
|---------------------|------|---------------------------------|
| Material            | -    | Al, CuZn, Nitrile (NBR), PA, SS |
| Temperature, max.   | °C   | 50                              |
| Temperature, min.   | °C   | -10                             |
| Weight, max.        | g    | 612                             |
| Feed pressure, max. | MPa  | 0.7                             |

## Dimensional drawings

