### Datasheet

# Suction cup VL30FC, G1/4"-G1/8"

### Article number: 0202703



- Suitable for flat or slightly corrugated or curved surfaces
- Good stability and little inherent movement
- Recommended when the lifting force is parallel to the surface of the object
- Cleats prevent thin, sensitive objects from being deformed and gives extra friction when the lifting force is parallel
- Volume discounts available for big packs from 30-99 pieces with an even larger discount for big packs of 100 pieces and above
- •
- PVC-free recycable material


#### **Technical data** Description Unit Value Flat Concave Suction cup shape Suction cup design Round TPE Material Suction cup model FC Height (B) 17.5 mm 9 Height 2 (D) mm 6 Inner diameter (C) mm Outer diameter, min. (A) 30 mm Fitting size 1/4", 1/8" Fitting option None Female/Male Fitting style G-thread Fitting type Suction cup model VL30FC TPE-U

#### **Performance - Lifting forces**

VL30FC TPE-U	Vertical (N)	Parallel (N)
50 -kPa	23 N	

Material TPE-U Name Colour Purple Temperature, min. | °C 0 60 Temperature max. | °C Hardness | <sup>o</sup>Shore A 65 **Material resistance** Alcohol n/a Concentrated acids n/a Ethanol n/a

Hydrolysis	n/a
Methanol	n/a
Oil	n/a
Oxidation	n/a
Petrol	n/a
Wear resistance	n/a
Weather and ozone	n/a

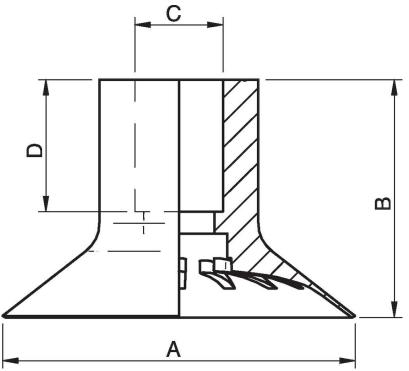

## Values specified in this data sheet are tested at (unless otherwise stated):

•Room temperature (20°C [68°F] ± 3°C [5.5°F]).

- •Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

#### Accessories

0202156 | Fitting VL D=Ø6, G1/8" - M5 0202160 | Fitting VL D=Ø6, 1/8" NPT - M5 0202161 | Fitting VL D=Ø6, 1/4" NPT - 1/8" NPSF

#### Spare parts

0202099 | Suction cup VL30FC 0202157 | Fitting VL D=Ø6, G1/4" - G1/8"