
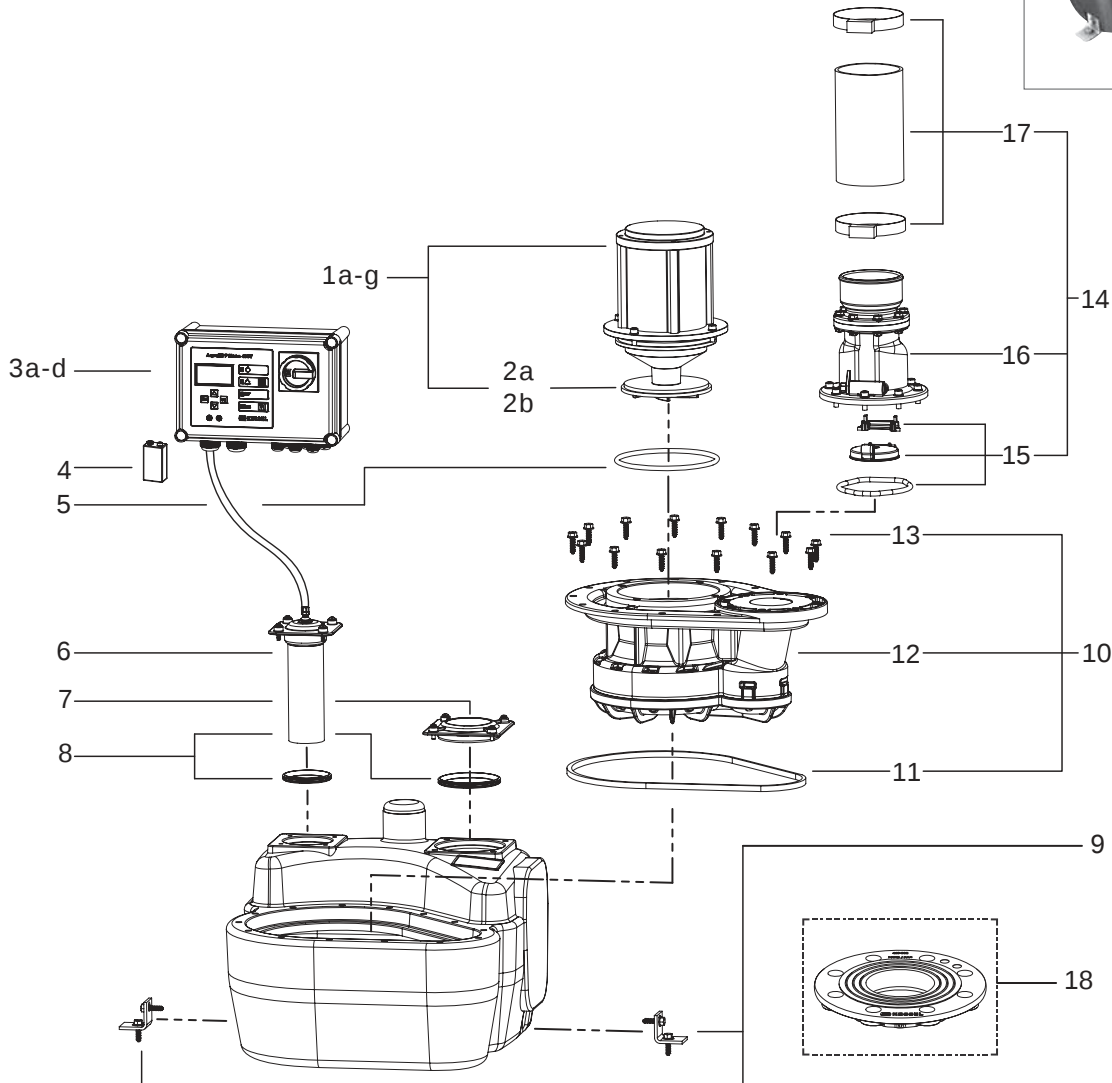




Pos.	Designation	Art. #
1	Motor with impeller *	
1a	SPF 1400, 230 V, S3, without capacitor, 5 m cable	680095
1b	SPF 1400, 230 V, S3, with capacitor, 5 m cable	28029
1c	SPF 1400, 230 V, S3, with capacitor, 10 m cable	680218
1d	SPF 1500, 400 V, S3, 5 m cable	28028
1e	SPF 1500, 400 V, S3, 10 m cable	680098
1f	SPF 3000, 400 V, S3, 5 m cable	28027
1g	SPF 3000, 400 V, S3, 10 m cable	680221
2	Impeller	
2a	for SPF 1400 and 1500	680643
2b	for SPF 3000	680642
3	Control unit*	
3a	Comfort, 230 V without capacitor	28731
3b	Comfort, 400 V for SPF 1500	28755
3c	Comfort, 400 V for SPF 3000	28756
3d	230 V with capacitor	680062

Pos.	Designation	Art. #
4	Battery	680034
5	Flange seal	680052
6	Immersion pipe with 5 m hose	680055
7	Cleaning cover	680044
8	Sealing gasket set	28608
9	Attachment bracket with screws (2 x)	680046
10	Replacement set pump flange, from model 03/2003	28051
11	Pump flange sealing gasket	680045
12	Pump flange, from model year 03/2003	680050
13	Screw set (14 x)	680047
14	Replacement set flap housing Ø 110	28676
15	Backwater flap, rolling ring and flap stay	680053
16	Flap housing, single station	680060
17	Pressure hose with 2 hose clamps, Ø 110	28663
18	Adaptor plate standard flange	28714

* In the combination pump and control unit with 230 V systems, there must be one capacitor available (not 0 and not 2 either).