

KESSEL-Pumping station *Aqualift S* und *F XL Mono/Duo* im Technischacht Installation in the ground, from model year 04/2017

Information

Backwater protection

1

Hybrid lifting stations

2

Lifting stations

3

Drains

4

Separators


5

Septic systems

6

Rainwater harvesting

7

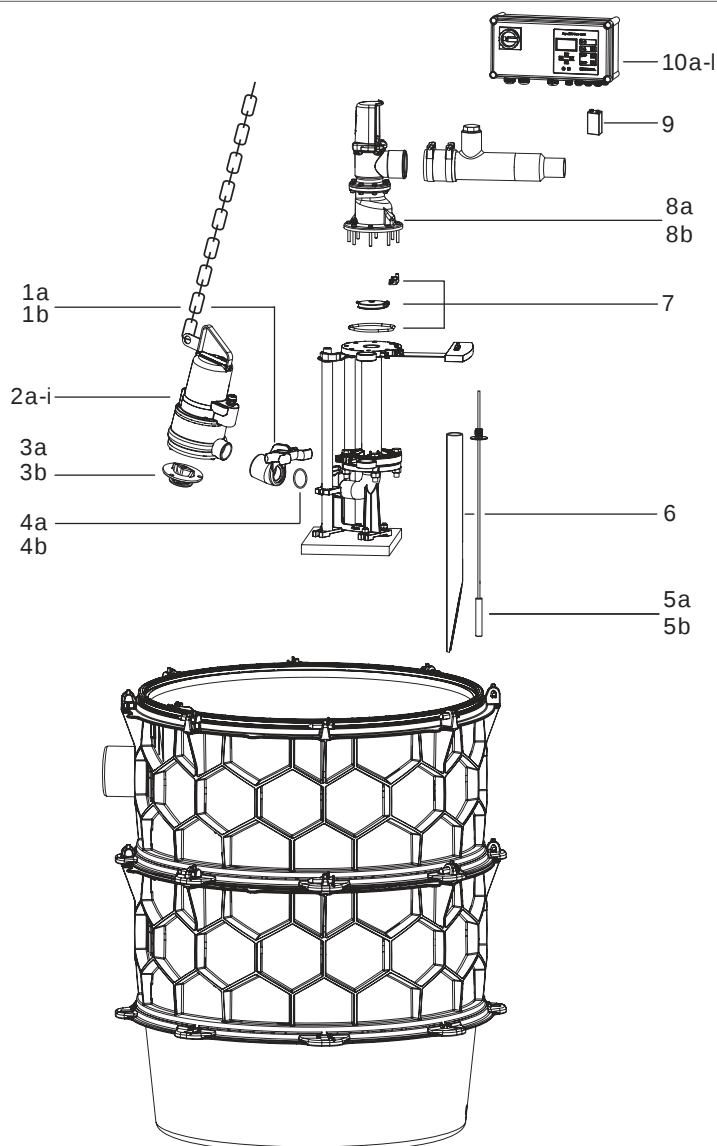

Pos.	Designation	Art. #
1	Pump clamp	
1a	2,0 inch incl. sealing gasket	680598
1b	2,5 inch incl. sealing gasket	680599
2	Replacement pump	
2a	STZ 1300-S1 10m ATEX (LK)	680604
2b	STZ 2500-S1 10m ATEX (LK)	680605
2c	STZ 3700-S1 10m ATEX (LK)	680606
2d	GTF 1600-S1 10m (LK)	680607
2e	GTF 2600-S1 10m (LK)	680608
2f	GTF 4000-S1 10m (LK)	680609
2g	GTK 1300-S1 10m (LK)	680610
2h	GTK 2600-S1 10m (LK)	680611
2i	GTK 3700-S1 10m (LK)	680612
3	Macerating (cutting) set	
3a	for STZ 1300 and 2500	680717
3b	for STZ 3700	680718
4	Sealing gasket	
4a	for Pump clamp 2,0 inch	680596
4b	for Pump clamp 2,5 inch	680597
5	Hydrostatic sensor	
5a	with cable fastener	680600

Pos.	Designation	Art. #
5b	mit cable fastener ATEX	680601
6	Protective pipe for hydrostatic sensor	680603
7	Rolling ring, stainless steel flap and flap stay	680053
8	Flap housing	
8a	for single station with backwater flap	680602
8b	for double station	680419
9	Battery	680034
10	Control unit	
10a	400V Comfort Mono 1.6 kW (for GTF 1600, GTK 1300)	680613
10b	400V Comfort Mono 1.6 kW ATEX (for STZ 1300)	680614
10c	400V Comfort Mono 2.7 kW (for GTF 2600, GTK 2600)	680615
10d	400V Comfort Mono 2.7 kW ATEX (for STZ 2500)	680616
10e	400V Comfort Mono 4.7 kW (for GTF 4000, GTK 3700)	680617
10f	400V Comfort Mono 4.7 kW ATEX (for STZ 3700)	680618
10g	400V Comfort Duo 1.6 kW (for GTF 1600, GTK 1300)	680619
10h	400V Comfort Duo 1.6 kW ATEX (for STZ 1300)	680620
10i	400V Comfort Duo 2.7 kW (for GTF 2600, GTK 2600)	680621
10j	400V Comfort Duo 2.7 kW ATEX (for STZ 2500)	680622
10k	400V Comfort Duo 4.7 kW (for GTF 4000, GTK 3700)	680623
10l	400V Comfort Duo 4.7 kW ATEX (for STZ 3700)	680624