

108LAV PN20 - Fully Lined Butterfly Valve

Beskrivelse

- 108LAV PN20 Fully Lined Butterfly Valve
- Lug Type ASME-standard
- Size range: DN 80-600 / NPS 3" - 24"
- Pressure rating: ASME B16.5 CL150 (PN 20)
- Temperature range: EN -15°C (-4°F) to 180°C (392°F)
- Material body: Ductile iron EN-JS 1049 / 6/ PFA & PTFE Teflon® lined
- Material disc/stem: Duplex (1.6982 / PFA)
- Face to Face: API 609 Excellent references at seawater applications Approved to NORSOK standard / TR2000 Successfully performed fire test acc. to API 607, 4th edition



Med forbehold om konstruksjonsendringer og tekniske endringer. Kan endres uten varsel

GPA Flowsystem A/S

Regnbueveien 9

NO-1405 Langhus


+47 (0)64-85 68 00

info@gpa.no

gpa.no

108LAV PN20 - Fully Lined Butterfly Valve

Teknisk spesifikasjon

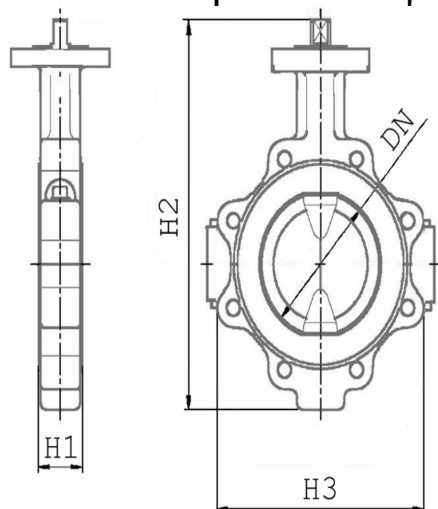

Artikkelnr	H1	H2	H3
X-887532NOR2-SSG	46	326	182
X-887625NOR2-SSG	52	360	210
X-887669NOR2-SSG	56	411	264
X-887708NOR2-SSG	60	480	327
X-887738NOR2-SSG	68	560	396
X-887781NOR2-SSG	78	594	467

Med forbehold om konstruksjonsendringer og tekniske endringer. Kan endres uten varsel

GPA Flowsystem A/S

Regnbueveien 9

NO-1405 Langhus

+47 (0)64-85 68 00

info@gpa.no

gpa.no