




AF-FL002 AQUA SEQUENCE

AQUA SEQUENCE 4 functions complete of program station P600 for sequential control of water jets, chromotherapy, times including electronic mixer to control temperature. Possibility to combine liquid or dry aromatherapy and music.


AQUA SEQUENCE R70C1234

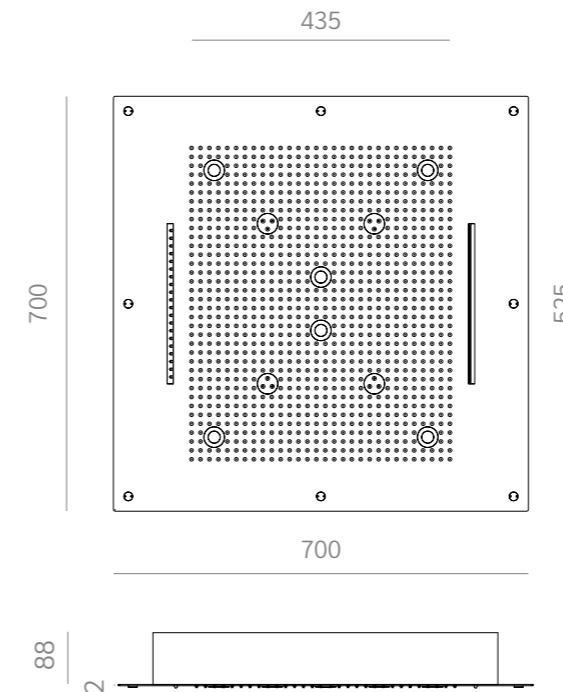

Description : Ceiling mounted built-in square showerhead 700 x 700 mm.
4 water-patterns : 1 rain jet, 4 nebulized jets, 1 tropical jet and 1 waterfall jet included 6 spotlights led with chromotherapy.
Materials : super mirror stainless steel plate, anti-limescale membrane in liquid silicone
Ceiling recess depth : 100 mm
Water Supply : 1/2" inch
Operating pressure : 1,5/5 bar
Recommended pressure : 3 bar
 Complete with fixing system
N.B. To be teamed with systems to manage hydraulic and electric part.



P600




SEQUENTIAL PROGRAM STATION FOR SHOWER PATH.

Electronic power station prepared to activate in sequence 8 steps with temporary control of water for each step. Light 1 channel RGB. Complete of Electronic mixer for control temperature. Equipped with keyboard with button to start program with transformer 12 V. Optional aromatherapy during the entire program.

N.B. To be teamed with a single wiring electrovalve C320 12V for each step.

C320



VALVES.


Solenoid valve for program station P600

P02214



CABLES.

6-pole cable with M12 female quick lock connector L = 5 m to be teamed with shower system and program station

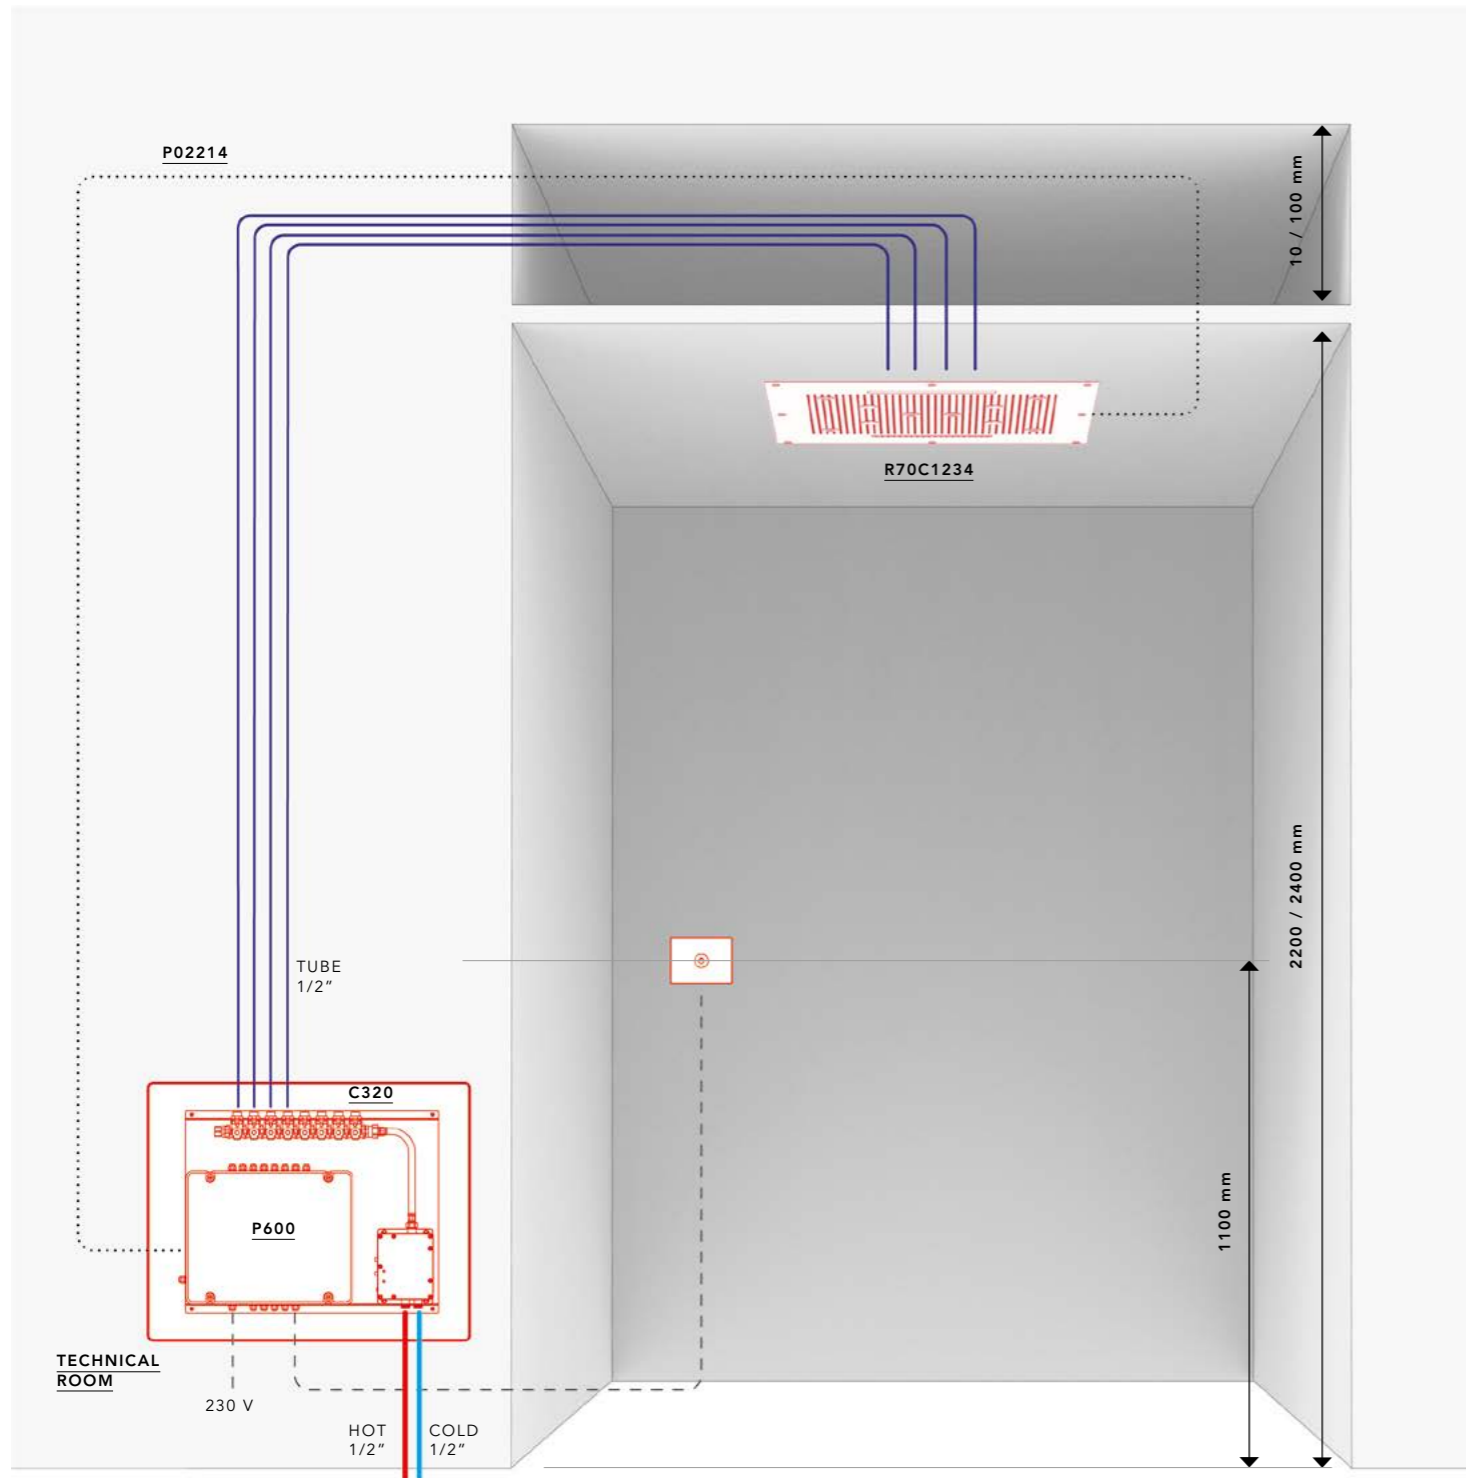INSTALLATION AQUA SEQUENCE

LEGEND

	WATER SUPPLY 1/2"
	ELECTRICAL CABLES CORRUGATED PIPE DIAM. 20mm
	LED CABLES DIAM. 20mm

TECHINCAL INFORMATION

WATER FLOW	min 30 l/m
WATER SUPPLY	1/2" inch
OPERATING PRESSURE	1,5/5 bar
RECOMMENDED PRESSURE	3 bar

CONFIGURATION

Code	Description	Jets	Quantity
R70C1234	SHOWERHEAD	Rain, Waterfall, Nebulized, Tropical and LED RGB	1
P600	SEQUENTIAL PROGRAM STATION	-	1
C320	SOLENOID	-	4
P02214	CABLES	-	1

OPTIONAL
OPTIONAL 01 - MUSIC

Code	Description	Quantity
PSOUND	mp3 device including amplifier with relative interface for sequential program station	1
KSOUND	Kit audio with 2 high output exit and connectors 2 poles . N.B. -To be teamed with keyboard touch (our cod. C57- C60) N.B. -To be teamed with PSOUND for use with aquaform program station.	1

OPTIONAL 02 - LIQUID AROMA

Code	Description	Quantity
RELP350	RELE' modules for 2 liquid essence kit.	1
PE427	Liquid essences kit. Dosing pump complete of: - Injector connector with tube kit - Neck off tank - Tank wall bracket	1
EL1/EL2/EL3/EL4	5 lt mint essence tank	1

OPTIONAL 03 - DRY AROMA

Code	Description	Quantity
A40	Recessed diffuser for aromatherapy system for diffusion and relative control flush-mounted 4 module box (type 504) kit packaging 3 flower-relax-energy essences supplied. Suitable for humid environments.	1
E1/E2/E3/E4/E5	AROMATHERAPY ESSENCE 3 cartridges set.	1