

AF-FL036 HORIZONTAL SHOWER

HORIZONTAL SHOWER

Horizontal shower is an horizontal shower and massage system, in supermirror stainless steel, CEILING mounted, with electronic mixer, chromotherapy and control panel touch to manage 4 pre set up programs (sport, energy, relax, balance) or manual start up.

Hydraulic features:


- Water supply functioning with hot and cold water
- Pressure 2÷5 bar
- Recommended pressure 3 bar
- For pressure superior to 5 bar we suggest to install a pressure reducer
- Temperature cold water 10°+15° C
- Temperature hot water 55°+65° C
- Optimal hot water flow 15 l/m

NB:


- Is necessary to provide for a floor drain to let the water flow
- Is suggested to install a water softener device for hardness superior to 15/18 degrees F° (french)

Electrical features:

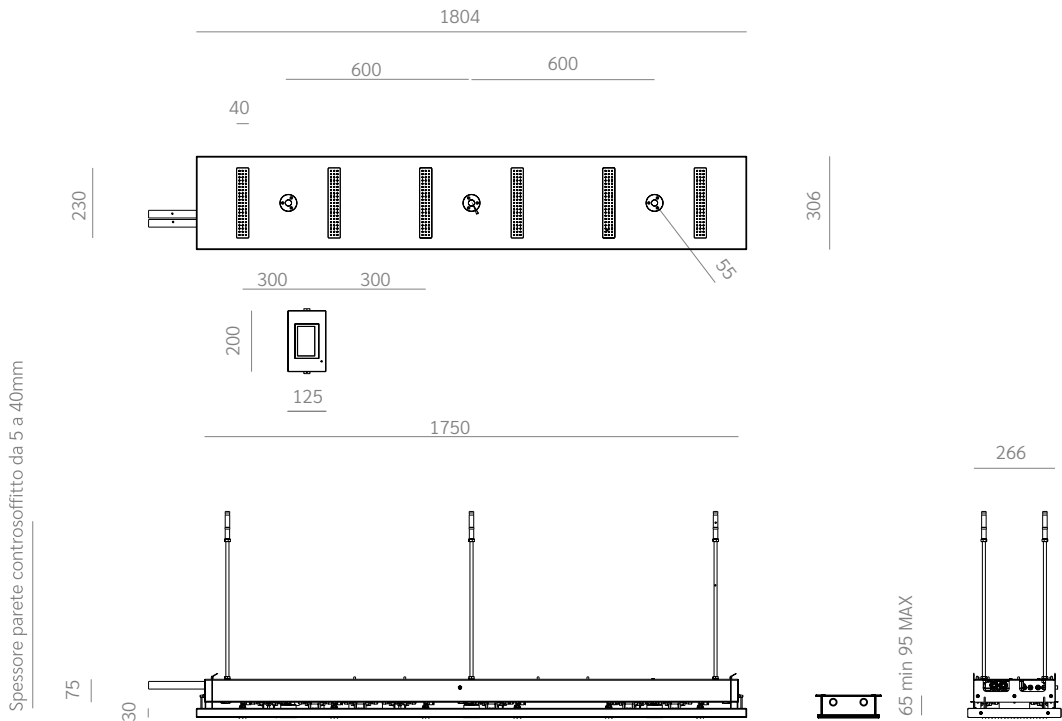


- Electrical supply 100-240V - 50+60Hz
 - Functioning control panel 12V
 - Maximum absorption 100W
 - We suggest to install a dedicated differential switch.
- N.B. To be teamed with system to manage hydraulic part

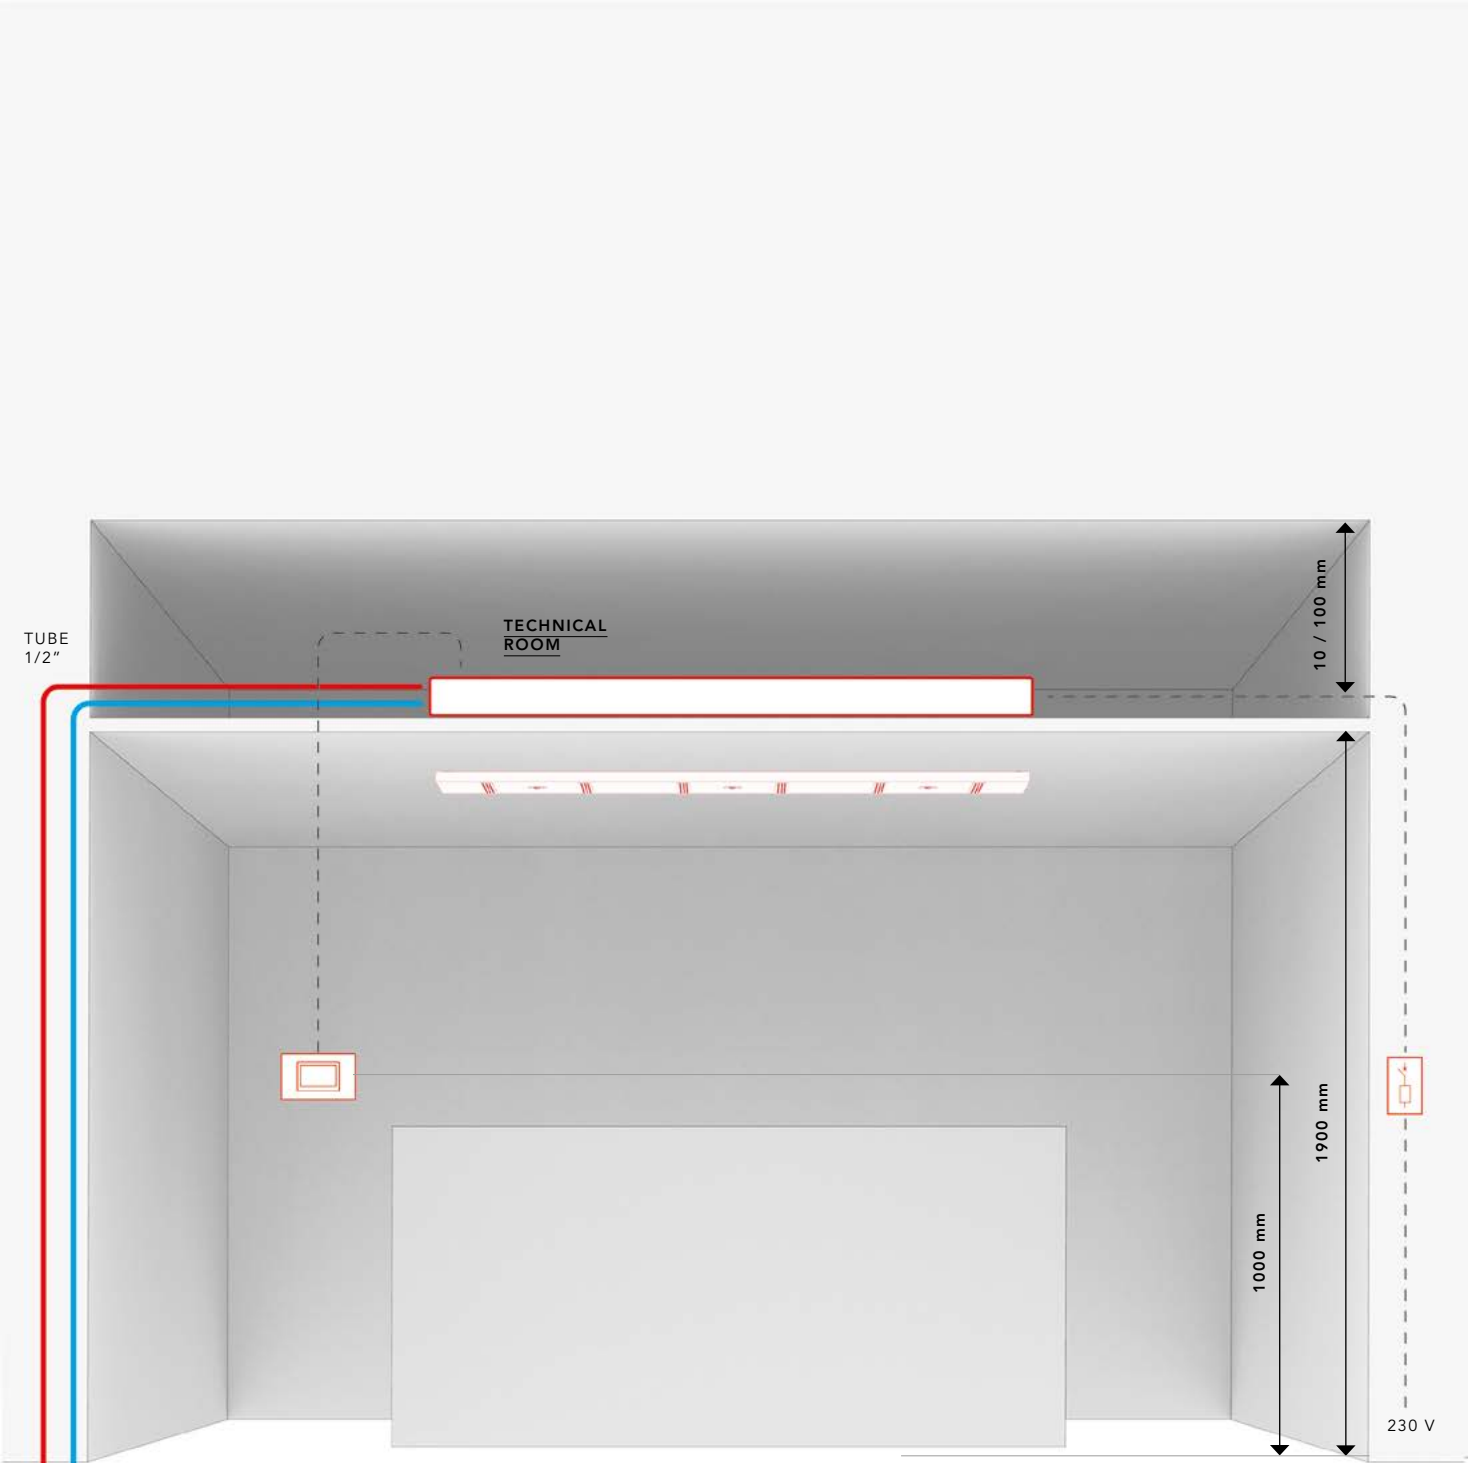

INSTALLATION HORIZONTAL SHOWER



LEGEND

-  WATER SUPPLY 1/2"
-  ELECTRICAL CABLES
CORRUGATED PIPE DIAM. 20mm
-  LED CABLES DIAM. 20mm

TECHINCAL INFORMATION

WATER FLOW	min 15 l/m
WATER SUPPLY	1/2" inch
OPERATING PRESSURE	1,5/5 bar
RECOMMENDED PRESSURE	3 bar

CONFIGURATION

Code	Description	Jets	Quantity
HORIZONTAL SHOWER	SHOWERHEAD		1