


Side Residential Laminated Filter

STANDARD FEATURES

- ✓ Filter manufactured by spraying up of resin polyester and fiberglass.
- ✓ Filter in white color.
- ✓ Bolts in 316 AISI.
- ✓ Arm collectors of 1".
- ✓ Connections to multiport valve of six positions.
- ✓ Maximum pressure 2,5 bar.
- ✓ Maximum temperature 50° C.
- ✓ Air drain 1/4".
- ✓ Water drain 1/4".
- ✓ Transparent top lid with screws.

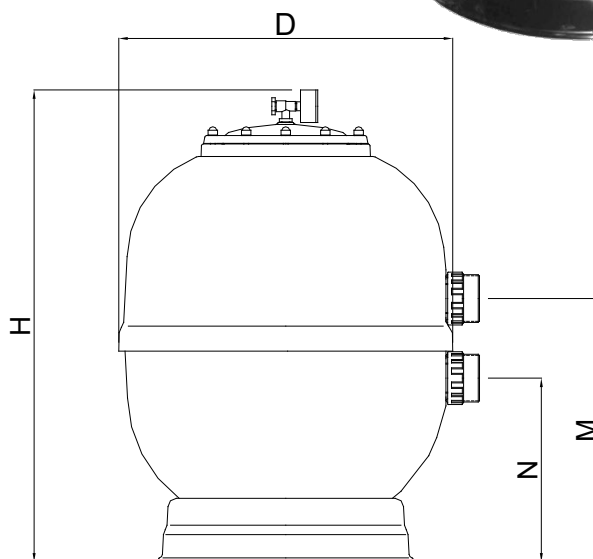


Features & Dimensions

Code	20611FP200	20612FP200	20613FP200	20614FP200
Ø (mm)	500	600	750	900
Connections (inch)	1 ½"	1 ½"	2"	2 1/2"
Filtering velocity (m3/h/m2)	50	50	50	50
Flow (m³/h)	9	14	21	32
Maximum pressure (Bar)	2,5	2,5	2,5	2,5
Sand (kg)	90	125	305	510
Net weight (kg)	20	25	33	51
Pool (m3)	72	112	168	240
Box (cm)	56 x 56 x 85	65 x 65 x 86	80 x 80 x 93	96 x 96 x 110
Packaging (cm)	120 x 120 x 240	129 x 129 x 187	80 x 80 x 201	120 x 100 x 235
Units per palet	10	8	2	2
D (mm)	530	635	780	935
H (mm)	855	900	1035	1100
M (mm)	415	455	555	850
N (mm)	290	330	325	270

Top Residential Laminated Filter

STANDARD FEATURES

- ✓ Filter manufactured by spraying up of resin polyester and fiberglass.
- ✓ Filter in white color.
- ✓ Bolts in 316 AISI.
- ✓ Arm collectors of 1".
- ✓ Filter for a multiport top valve.
- ✓ Maximum pressure 2,5 bar.
- ✓ Maximum temperature 50° C.
- ✓ Air drain 1/4".
- ✓ Water drain 1/4".

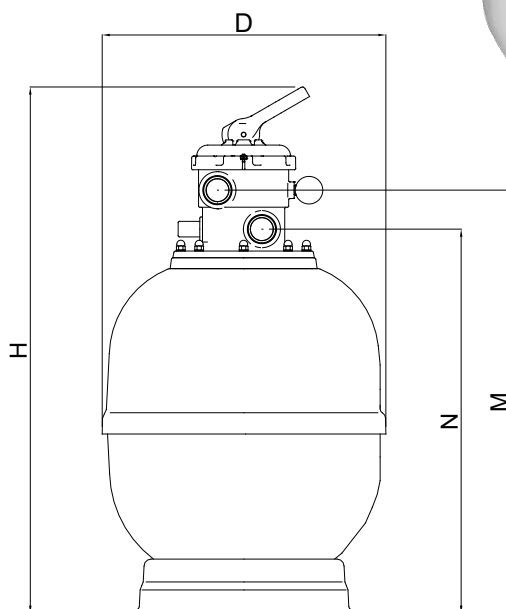

Features & Dimensions

Code	30770FP200	30771FP200	33847FP200	33848FP200
Ø (mm)	500	600	750	900
Connections (inch)	1 ½"	1 ½"	2"	2"
Filtering velocity (m3/h/m2)	50	50	50	50
Flow (m³/h)	9	14	21	32
Maximum pressure (Bar)	2,5	2,5	2,5	2,5
Sand (kg)	90	125	305	510
Net weight (kg)	20	25	33	51
Pool (m3)	72	112	168	240
Box filter (cm)	56 x 56 x 85	65 x 65 x 86	80 x 80 x 93	96 x 96 x 110
Packaging filter (cm)	120 x 120 x 240	129 x 129 x 187	80 x 80 x 201	120 x 100 x 235
Units filters per palet	10	8	2	2
D (mm)	530	635	780	935
H (mm)	1015	1060	1235	1300
M (mm)	825	870	1025	1090
N (mm)	755	800	950	1015