


SENCO CN FLAT HDG DP RING SENC. 2,3X45MM CARBON STEEL STANDARD TENSILE

EL19ASBHR

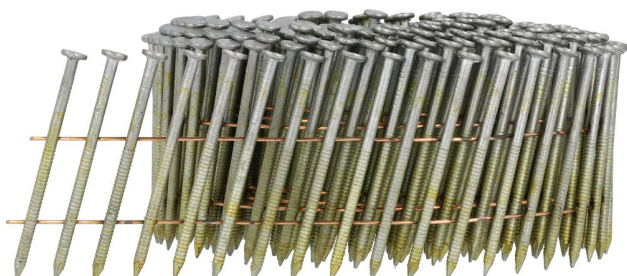

APPLICATIONS

Sheathing, subfloor, particle boards


TECHNICAL SPECIFICATIONS

Collation angle	16 °
Wounding type	Flat
Collation type	Wire collated
Wire material	Carbon steel standard tensile
Finish	Hot-Dipped galvanised 3
Coating	Sencoted
Nail head type	Full round head
Nail shank type	Ring shank
Point type	Diamond
Pointangle	36 °
First welding wire distance	18.5 - 19.5 mm
Second welding wire distance	37 - 38 mm
Nail length	45 mm
Nail diameter	2.3 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274028927
Package quantity	2400 pieces
Net weight	4.1 kg

FASTENER SPECIFICATIONS



CE SPECIFICATIONS

CE fastener type	Round cross-section ring shank nail
Protection level in micron	55
Service class	3
Coating type	Coating type 3
Coating length	31.5 mm
Head cross sectional area	23 mm
Threaded/profiled length	26 mm
Characteristic yield moment	1523 Nmm
Characteristic head pull through parameter	22.4 N/mm ²
Characteristic tensile strength	620 N/mm ²