Datasheet

Suction cup F50-2 Nitrile-PVC, G1/4" male, with mesh filter and dual flow control valve

Article number: 9909458



- Suitable for flat objects.
- Good stability and little inherent movement.
- Recommended when the lifting force is parallel to the surface of the object.
- Cleats prevent thin, sensitive objects from being deformed and gives extra friction when the lifting force is parallel.

Technical data

i ecililicai data		
Description	Unit	Value
Suction cup shape	-	Flat
Application	-	Dry sheet metal
Suction cup design	-	Round
Characteristics	-	Dry sheet metal
Material	-	Nitrile-PVC (NPV)
Weight, min.	g	14
Suction cup model	-	F
Volume	cm ³	10
Leakage flow, max.	NI/s	0.16
Height	mm	32.5
Outer diameter, min.	mm	53
Outer diameter, actuated	mm	54.6
Fitting size	-	1/4"
Fitting option	-	Dual flow control valve, Filter mesh
Fitting style	-	Male
Fitting type	-	G-thread
Valve restriction	mm	1
Suction cup model	-	F50-2
Movement, vertical max.	mm	2.2
Curve radius, min.	mm	55

Performance - Lifting forces

F50-2	Vertical (N)	Parallel (N)
20 -kPa	36	24
60 -kPa	74	40
90 -kPa	96	50

Material


Name	Nitrile-PVC (NPV)
Colour	Black
Temperature, min. °C	0
Temperature max. °C	90
Hardness °Shore A	50
Material resistance	
Alcohol	Good
Concentrated acids	Fair
Ethanol	n/a
Hydrolysis	Good
Methanol	n/a
Oil	Excellent
Oxidation	Good
Petrol	Excellent

Excellent

Good

Dimensional drawings

Wear resistance Weather and ozone

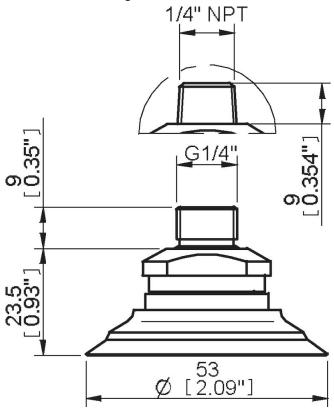

Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] \pm 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg] \pm 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

0100262 | Fitting 5x1/8" NPSF female, 50

0101138 | Suction cup F50-2 Silicone

0101154 | Fitting 1/8" NPSF female, 50, with mesh filter

0101157 | Fitting 1/8" NPSF female, 50, with cone valve

0108166 | Suction cup F50-2 HNBR

3150198 | Fitting 1/8" NPSF female, 50, PA

3250017 | Fitting 1/8" NPSF female, 50

3250087 | Fitting G3/8" male, 50, with mesh filter

3250090 | Fitting 3/8" NPT male, with mesh filter

3250092 | Fitting G1/4" male, 50, with mesh filter

3250094 | Fitting 1/4" NPT male, with mesh filter

3251012 | Fitting 1/8" NPSF female, 50, with dual flow control valve

3251014 | Fitting 1/4" NPT male, with dual flow control valve

3251015 | Fitting G3/8" male, 50, with mesh filter and dual flow control valve

3251016 | Fitting 3/8" NPT male, with dual flow control valve

3251017 | Fitting 5x1/8" NPSF female, 50, with dual flow control valve

3150241P | Suction cup F50-2 Nitrile-PVC, for fitting with cone valve

3150241S | Suction cup F50-2 Silicone, for fitting with cone valve

Spare parts

0101137 | Suction cup F50-2 Nitrile-PVC

3150057 | Cone valve for F50-2

3251013 | Fitting G1/4" male, with mesh filter and dual flow control valve

