



Justrite Safety Group

T23 Multi-Mat II®

Reversible anti-slip drainage mat



Ergonomic, Anti-fatigue & Safety Matting - Food Processing and Food Service Matting

T23 Multi-Mat II®

Reversible anti-slip matting provides comfort and adds traction for good adherence in dry, wet and greasy areas. Useable on both sides for extended life. An effective, economical and durable solution to reduce the risk of slips and falls. Light weight to facilitate lifting and cleaning.

- Low profile for easy cart access
- Drainage holes for instant evacuation of fluids allow debris to fall through, leaving the surface clear
- Raised studs provide grip and aeration and keeps mat from shifting

Recommended use


- Wet/Dry and Oily Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Medium duty

Colors:

- Black

Sizes:

- 122cm x 122cm
- 122cm x 244cm
- 60cm x 122cm
- 60cm x 244cm
- 91cm x 122cm
- 91cm x 244cm
- 122cm x 975cm
- 60cm x 975cm
- 91cm x 975cm

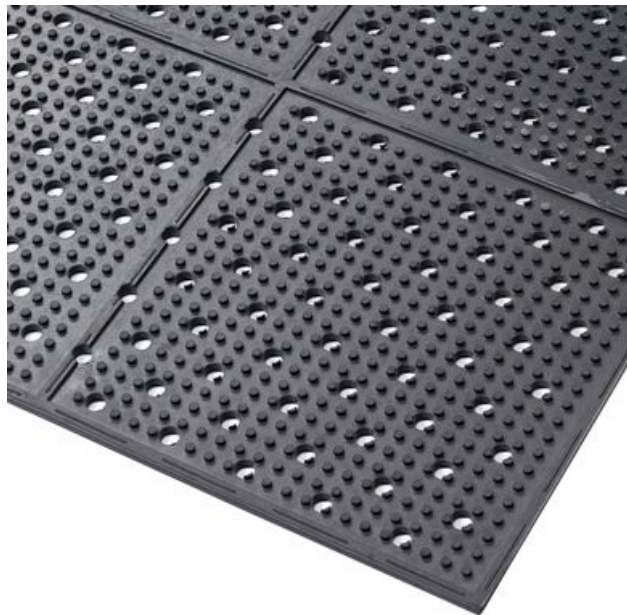

WEAR RESISTANCE

SLIP RESISTANCE

ANTI-FATIGUE



Ergonomic, Anti-fatigue & Safety Matting - Food Processing and Food Service Matting

Multi-Mat II®

General

Brand	Notrax
Category	Food Processing and Food Service Matting
Product Number	T23
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Multi-Mat II®
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Achterzeedijk 57, Unit 15, Barendrecht 2992SB, The Netherlands, Chicago, IL 60638, United States
Type	Wet/Dry or Oily Areas - Anti Slip Mats
Update trigger	20210310-1301
Usage Intensity	Medium duty

Sustainability

REACH	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Recycled	True
Rohs US	Rohs compliant (Restriction of Hazardous Substances).
Sustainability	Recyclable material
Warranty	1

Tests

Abrasion Resistance 500	1.6%
Fire rating US	Pass
Coefficient Friction Dry	0.63
Surface Flammability	Pass

Technical Specifications

Application	Industrial Environments
Edges	No borders
Material	Natural rubber
Material Group	Natural rubber
Process	Compression Moulding

Multi-Mat™ II Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
T23R0232BL	60cm x 975cm	57.9	9.5
T23S0024BL	60cm x 122cm	7.12	9.5
T23S0044BL	122cm x 122cm	14.6	9.5
T23S0048BL	122cm x 244cm	28.7	9.5
T23S0028BL	60cm x 244cm	14.5	9.5
T23R0432BL	122cm x 975cm	115.8	9.5
T23R0332BL	91cm x 975cm	82	9.5
T23S0034BL	91cm x 122cm	13.3	9.5
T23S0038BL	91cm x 244cm	20.5	9.5