

TES
(Inline type)

Electrical Torque Wrenches


**TÜV
CERT**
ISO9001 : 2008



- +/- 3,5 % accuracy with torque cut off system
- From 90 Nm upto 12.000 Nm tightening & loosening capacities
- 200 different adjustable torque value
- 230 V operation power
- 2 gear (speed) operation
- Overload protection with slipping clutch
- Suitable for huge number of tightening and loosening operations
- Increase speed and productivity
- Good absorbing and little noise
- Ergonomic design


Scope of supply

- Reaction arm
- Torque adjustment table
- Instruction manual
- Certificate of calibration
- ISO9001:2000 Certificate
- Metal case



8 different model with various capacities

Model	TES-81	TES-101	TES-241	TES-351	TES-501/1K	TES-601/1	TES-901	TES-1200
Max. Torque (Nm)	850	1.200	2.500	3.500	5.000	6.000	10.000	12.000
Min. Torque (Nm)	90	130	430	360	800	820	1.930	1.400
Square drive	A 3/4" or 1"	1"	1"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Gear Diameter (mm)	D 88	88	88	88	88	130	130	175
Height (mm)	H 510	510	540	550	610	585	620	630
Weight (kg)	6,5	8	9	10	11	15	18	20
No Load Speed (rpm)	16	14	9	8	3	6	2,5	2,5

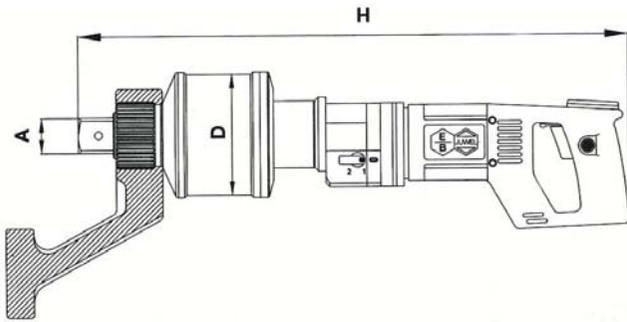

Ernst Berger & Sohne ,Juwel-Schraubtechnik GmbH

Werkstrasse 14, D-57537 Wissen, Germany

Tel: +49 2742 968 96-0

Fax: +49 2742 96896-22

www.juwel-schraubtechnik.com

e-mail: info@juwel-schraubtechnik.de

SURKON Ltd. Co.

1183. Sokak No:3 TR-06370 Ostim / Ankara / TÜRKİYE

Tel: +90.312 386 14 64

Fax: +90.312 386 14 63

www.surkon.com

e-mail: surkon@juwel-torquewrench.com

Distributed by

SURKON®
«provides quality products»