

nifty



SD120T

**SELF DRIVE
ACCESS PLATFORM**



12.65m (41ft 6in)

Working height

6.10m (20ft)

Working outreach

Weight Saving Design

Lower cost transportation &
better fuel economy on site

Telescopic Upper Boom

Greater accuracy when
positioning the platform

Bi-Energy Available

Optimising utilisation

**Fully Proportional
Hydraulic Controls**

Simple, reliable &
easy to maintain

Hydraulic Outriggers

Quick & easy to set up



niftylift.com





nifty SD120T



The **SD120T** delivers an impressive working envelope and with the advantage of a telescopic upper boom, supreme accuracy when positioning the platform. Hydraulic outriggers and 45% gradeability allow it to be driven and levelled on uneven surfaces making it ideal for environments with rough or softer ground and its low overall weight means better fuel efficiency and lower transportation costs.

SAFETY FEATURES

- Pressure sensitive outriggers with
- Audible & visual alarms
- Dual controls (platform & base)
- Manual descent with hand-pump
- Lock valves on all hydraulic cylinders
- CE Mark

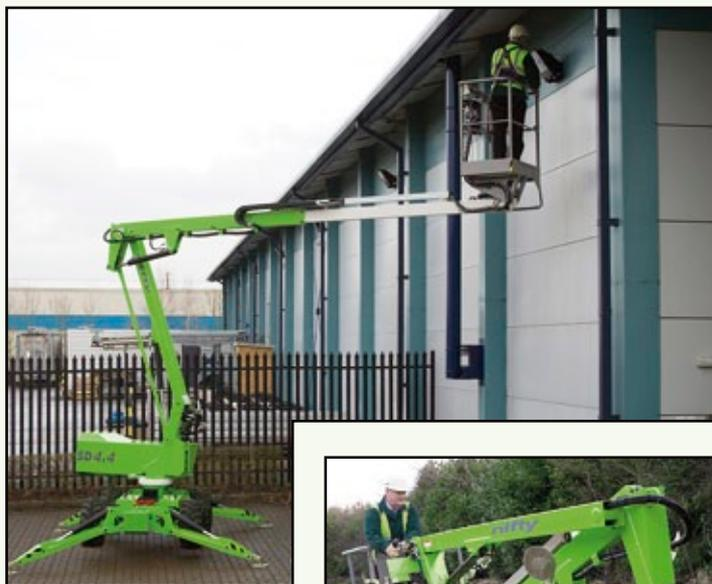

Niftylift's highly effective **Bi-Energy** system increases flexibility and maximises utilisation allowing the **SD120T** to operate for longer and in a wider range of environments.

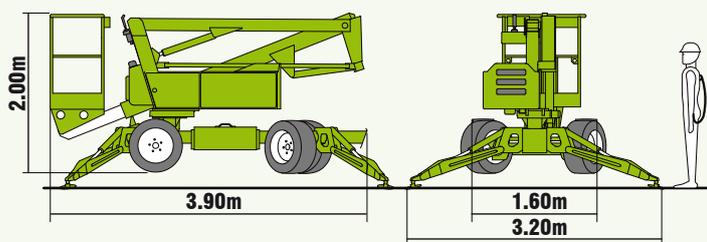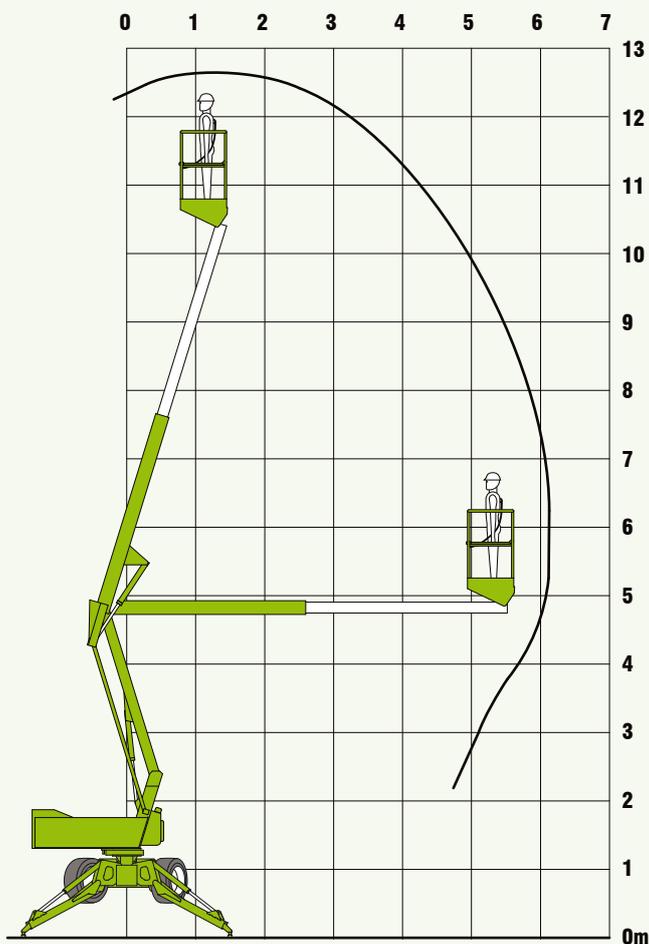

SPECIFICATIONS

Working Height	12.65m	41ft 6in
Platform Height	10.65m	35ft
Working Outreach	6.10m	20ft
Slew	406°	
Width - Travelling	1.60m	5ft 3in
- Working	3.20m	10ft 6in
Height	2.00m	6ft 7in
Length	3.90m	12ft 10in
Minimum Weight	2260kg*	4980lbs*
Turning Radius - Outside	3.90m	12ft 10in
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.65m	3ft 7in x 2ft 2in
Drive Speed	6.0kph	3.7mph
Gradeability	45% (24°)	
Control System	Fully Proportional Hydraulic	
Power Options	Battery Only Petrol or Diesel Only Bi-Energy (Engine and Battery)	

* Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com

e-mail: info@niftylift.com

Tel.: +44 (0)1908 223456

Fax.: +44 (0)1908 312733

