
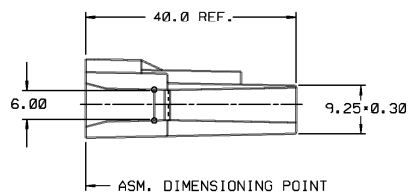

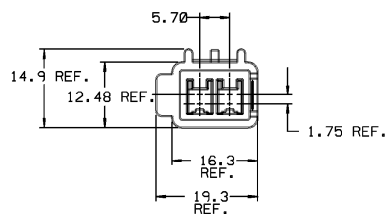


THIS DRAWING AND DESIGN HEREON CON-
STITUTES A PROPRIETARY DESIGN OF
PACKARD ELECTRIC DIVISION AND IS NOT
TO BE DUPLICATED OR REPRODUCED WITH-
OUT AUTHORITY OF PACKARD ELECTRIC
DIVISION.


DO NOT SCALE

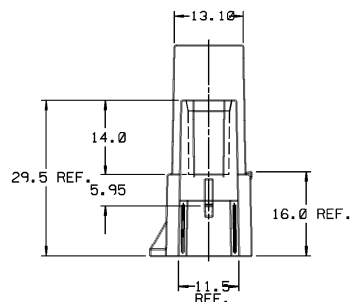

- NOTES —
1. DIMENSIONS ARE TO FACE OF SHOWN, UNLESS OTHERWISE INDICATED.
 2. CAVITIES TO ACCEPT 12066337 TERMINAL OR EQUIVALENT.
 3. MAX. INSULATION CRIMP MUST BE LESS THAN 4.35 HIGH AND 4.2 WIDE
 4. MAX. CABLE O.D. MUST BE LESS THAN 4.2.
 5. MATING CONNECTOR 12092420 OR EQUIVALENT.
 6. SEALING CODE Ø.
 7. TERMINAL POSITION ASSURANCE FEATURE IS ACHIEVED BY USE OF PULL TO SEAT TERMINAL DESIGN.
 8. THIS PART DOES NOT HAVE A CONNECTOR POSITION ASSURANCE FEATURE.
 9. THIS PART IS DESIGNED FOR USE IN ALLISON ATEC II TRANSMISSIONS.
 10. DIMENSIONS MARKED "REF." ARE FOR REFERENCE ONLY AND NO TOLERANCE LIMITS ARE ESTABLISHED.
 11. (2.3)X(0.1) RAISED DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION TO BE "PED" OR NO LOGO.
 12. MATERIAL RECYCLING CODE *PA66* PER SAE J1344. (2.3)X(0.1) RAISED CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE NO MATERIAL RECYCLING CODE.

[illegible]

PART NO.	1211 0139
----------	-----------

		FILE NO. ***** SPEC. CONSPICUOUS*****	
THIRD ANGLE PROJECTION			
CODE NO. 6900		METRIC DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.	
D.C.	TOLERANCE UNLESS OTHERWISE SPECIFIED ONE PLACE ± .3 TWO PLACE ± .15	ANGULAR ± 2°	
DWG. DATE 30MY89	DR. C. WILSON	26 APR 89	
EST. NO.	C. WILSON	DATE 26 APR	
REFERENCE NO. 12110139 'E' SIZE	APPR. R.H. PARKHURST	DATE 11MY89	
MATERIAL SPEC.	APPR. R.E. DAUM	DATE 11MY89	
M3592012 P A66 HS IM GRAY LT			
NAME CONN 2M M/P 280 P25			
PART NO.			SIZ
OUTLINE DRAWING			

PACKARD ELECTRIC