








TYPE 202
SAME AS TYPE 201 EXCEPT AS SHOWN






TYPE 201



SECTION B-B
CORE GRIP



SECTION C-C
INSULATION GRIP

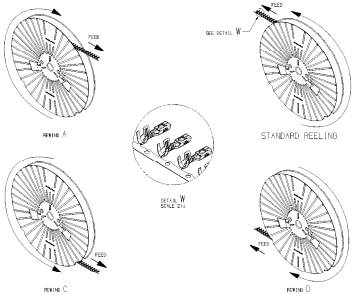





SECTION A-A




DETAIL Y
SCALE 30/1

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY PICKED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL DIMENSIONS NOT SHOWN, SEE MATH MODEL FOR PRECISE TOOL BUILD. SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. "X" INDICATES MAKE DIE SERIES LETTER (A, B, C, ETC).
3. (2.3)X(0.2) DELPHI CORPORATE BRAND STAMP TO BE LOCATED ON THIS EXTERIOR SURFACE, (VISIBLE AT FINAL ASSEMBLY). OPTIONAL CONSTRUCTION FOR EXISTING TOOLING MAY BE "MOLD" OR "PCT" LOGO.
4. TERMINAL SYMMETRICAL ABOUT CENTERLINE EXCEPT AS SHOWN.
5. CONFORMS TO ALL APPLICABLE SECTIONS OF
   SAE/USCAR-2 REV.3 EXCEPT TERMINAL BEND RESISTANCE SECTION 5.3.2
   SAE/USCAR-12 REV.2
   SAE/USCAR-21
   FORD SEG YER 11
6. PLATING TYPE:
   1. HOT DIP TIN 0.5 - 2.5 MICROMETERS THICK
   PLATING TYPE INFORMATION SHOWN ABOVE IS REFERENCE ONLY. PLATING REQUIREMENTS ARE CONTAINED IN APPLICABLE MATERIAL SPECIFICATION.
7. DO NOT APPLY OIL, TEST OR OTHERWISE CONTACT THE INTERIOR REGION (THE SPRING OR ANY MOVING PART) OF THIS TERMINAL BEFORE CRIMPING CAN OCCUR, COMPROMISING THE PERFORMANCE OF THE ELECTRICAL INTERFACE.
8. REFERENCE MATING COMPONENTS OR EQUIVALENT:
   TERMINAL - TYCO 1393190-1 OR 1393190-2
   USCAR DRAWING - EMCAP-001 FOR DEVICE APPLICATIONS

| | | |