

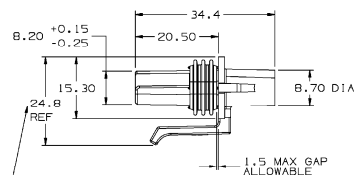






D	THIS DRAWING AND/OR ELECTRONIC FILE, AND THE DESIGN HEREON, CONSTITUTES A PROPRIETARY DESIGN OF DELPHI PACKARD ELECTRIC SYSTEMS.
	DO NOT SCALE


DELPHI PACKARD ELECTRIC SYSTEMS
WARREN, OHIO 44466

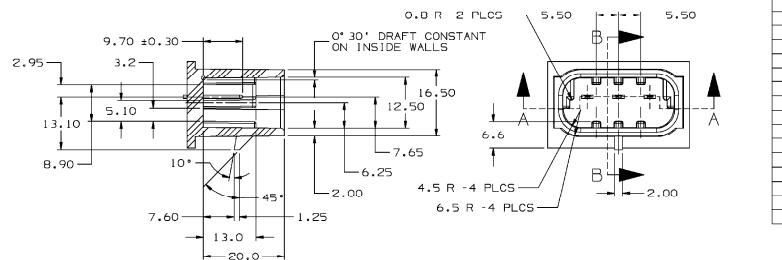

THIS DIMENSION CAN INCREASE
TO 30.0 MAX, WHEN BEING
ASSEMBLED TO MATING PART



SECTION B-B



SECTION A - A

MATING CONNECTOR INFORMATION

- NOTES:
1. CAVITIES TO ACCEPT 12077411 TERMINAL OR EQUIVALENT
 2. USE CABLE SEAL 12015323 OR EQUIVALENT
 3. CONNECTOR TO ACCEPT 12034145 SECONDARY LOCK (TPA) OR EQUIVALENT.
 4. THIS CONNECTOR TO MATE WITH AC6456 SENSOR
 5. WHEN PARTS ARE SHIPPED THEY MUST BE PACKED IN PLASTIC BAGS OR SHIPPING CONTAINERS MUST BE SPECIFIED PLASTIC LINERS. BAGS OR LINERS MUST BE SEALED TO AVOID ENTRY OF FOREIGN MATTER.
 6. SEALING CODE 3.
DESIGN WILL PASS SALT FOG AND IMMERSION TEST
AFTER CONDITIONING BY COMPUTER IN ESA-644
(WEATHER-PACK), ESA-710 (METRI-PACK), ESA-650
(UNDERHOOD MICRO-PACK), C-4006 (WORLD CONNECTOR),
ETC. WHEN MATED TO MATING PART OR EQUIVALENT.
 7. DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION.
(SEE MATH MODEL FOR PRECISE DIMENSION)
FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR
TOTAL BUILD, SEE MATH MODEL FOR PRECISE DIMENSIONAL DATA.
 8. DIMENSIONS MARKED "REF" ARE FOR REFERENCE ONLY
AND NO TOLERANCE LIMITS ARE ESTABLISHED.

[illegible]

PART NO
1203 4147

DRAWING TITLE DETAIL		OTHER DRAWINGS AVAILABLE	
Ugraphics II (HATCH ANGLE: PREVIOUS)		METRIC DIMENSIONS ARE IN MILLIMETERS (UNLESS OTHERWISE SPECIFIED) TO NEAREST 0.05 DIMENSIONS IN INCHES (UNLESS OTHERWISE SPECIFIED) TO NEAREST 1/16	
CODE NO 6900	QC -C-5110	ONE PLACE ± 0.3 TWO PLACE ± 0.15	DES DR DAVE BOCK 20ABR86 CK LVL GLEASON 07JAN87 APPR J.C. GRIFFIN 03DEC86 VOL CM
DATE 29JUN82	SCALE 2:1	SEE DRAWING	
MATERIAL SPEC		NAME	
ASM CONN 3F W/P 280 SLD			
PART NUMBER 1203 4147		SIZE A	