SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL [ ] DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	52
	LAST NO. USED	42

MISSING SYMBOLS
NO MISSING SYMBOL NUMBER

DWG STATUS DATE	STS	REV	N/P	CHG	ZONE	REVISION HISTORY	AUTH	DR	APPD	APVD
04JA07	R	04	-	-		ALL ACTIVE PARTS - CREATED PART DRAWING	4006/98	RMB	FRO	
06JN09	R	05	-	-		ALL ACTIVE PARTS - REDRAWN TO PD	404957	DMC	JWD	GL
13JU09	R	06	-	-		ALL ACTIVE PARTS - UPDATED PDM ATTRIBUTES	408647	DMC	SG1	MR
30NB10	R	07	-	-		ALL PARTS - UPDATED PDM ATTRIBUTES	410413	DMC	DMC	LHT
18JN15	R	08	-	-		12004801, 12004460 MAKE OBSOLETE	429647	RCE	LES	WR

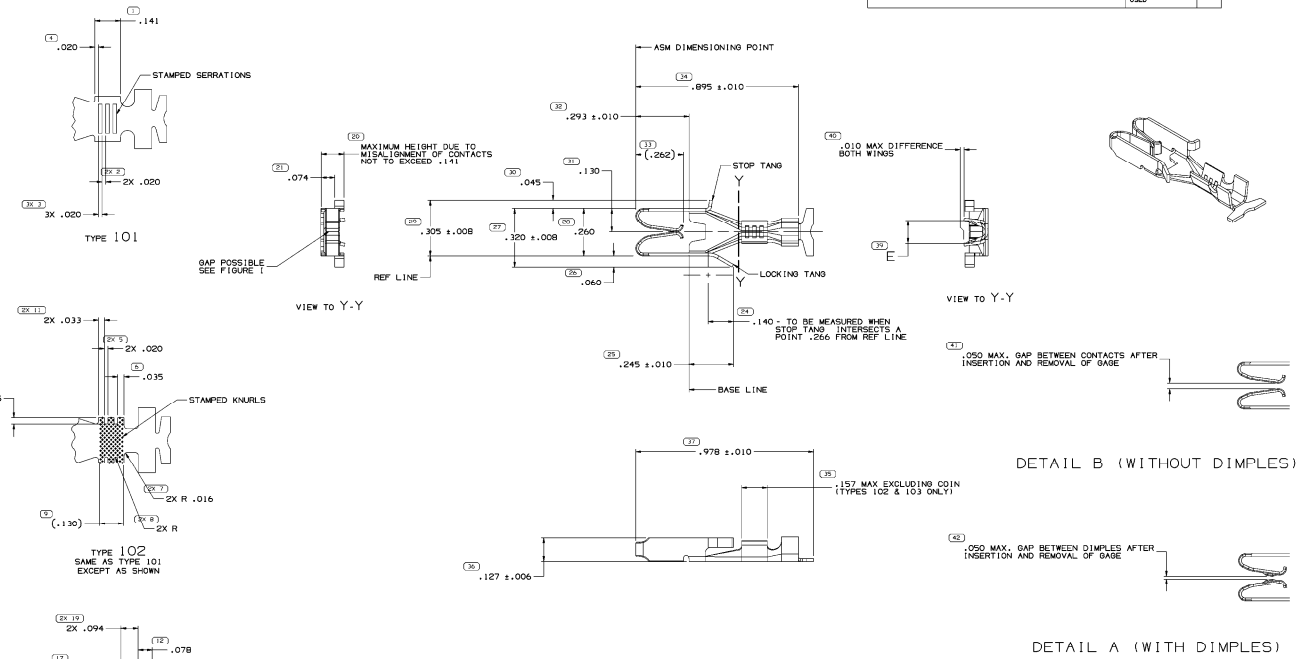

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:

   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.

2. TERMINAL DESIGNED TO FIT .0665±.0085 THICK PRINTED CIRCUIT BOARD WITH ONE OUNCE COPPER ON ONE SIDE. CURRENT LIMITATION AS TESTED IN A 13 CAVITY CONNECTOR IS A 6 AMPS @ 50°C RISE.

3. TANG RECOVERY AFTER-INSERTION INTO .276 FUNCTIONAL GAUGE .320±.008 TANG WIDTH MUST RECOVER TO .292 MIN.

4. VISIBLE CRACKS ARE NOT PERMISSIBLE.

5. CONTACT RECOVERY NOTE.
   A. WITH DIMPLES - SEE DETAIL A.
   B. WITHOUT DIMPLES - SEE DETAIL B.

6. DO NOT PROBE, TEST OR OTHERWISE CONTACT THE INTERIOR REGION (THE SPRING OR ANY MOVING PART) OF THIS TERMINAL. SEVERE DAMAGE CAN OCCUR, COMPROMISING THE PERFORMANCE OF THE ELECTRICAL INTERFACE.

PART NO.	REV	STATUS	MAT'L SIZE	MAT'L SPEC	SIZE (MM²)	DIA	DIMPLED CONTACTS	TYPE	E±.015
12052213	B	OBSOLETE	.0160 X 1.438	METL NONFERROUS C42500 EX HD	16	.089-.082	YES	103	.145
12040502	B5		.0160 X 1.438	METL NONFERROUS C42500 EX HD	18-20	.095-.081	YES	102	.125
12020229	B	OBSOLETE	.0160 X 1.438	METL NONFERROUS C42500 EX HD	TWO 22	.079-.053	YES	101	.140±.008
12015044	C7		.0160 X 1.438	METL NONFERROUS C42500 EX HD	12	.145-.139	YES	101	.180
12010950	C6		.0160 X 1.438	METL NONFERROUS C42500 EX HD	TWO 18-20	.095-.081	YES	101	.200
12010767	C7		.0160 X 1.438	METL NONFERROUS C42500 EX HD	22-24	.082-.044	YES	101	.085±.008
12010533	B6		.0160 X 1.438	METL NONFERROUS C42500 EX HD	14-16	.120-.101	YES	101	.145
12016124	C	OBSOLETE	.0160 X 1.438	METL NONFERROUS C42500 EX HD	18-20	.095-.081	YES	101	.125
12004801	B7	OBSOLETE	.0160 X 1.438	METL NONFERROUS C42500 EX HD	12	.145-.139	NO	101	.180
12004460	C7	OBSOLETE	.0160 X 1.438	METL NONFERROUS C42500 EX HD	TWO 18-20	.095-.081	NO	101	.200
08917429	B6		.0160 X 1.438	METL NONFERROUS C42500 EX HD	14-16	.120-.101	NO	101	.145
08917221	B6		.0160 X 1.438	METL NONFERROUS C42500 EX HD	18-20	.095-.081	NO	101	.125

PLATED — CABLE

PROCESS SENSITIVE DIMENSION	
DIMENSIONS INCLUDE PLATING UNLESS OTHERWISE SPECIFIED	
DIMENSIONAL TOLERANCE (TIR)	SHEET 2
FROM	TO	
0	3.000	±.005
TOLERANCE UNLESS OTHERWISE SPECIFIED	±.010
ANGULAR TOLERANCE ±2°	

PART TYPE: PART DRAWING
STYLE
VOLUME (CU³)
STATE CODE
UNLESS OTHERWISE SPECIFIED
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 (EXCEPT AS NOTED) AND ISO 10135-1:2000 (EXCEPT AS NOTED). DIMENSIONS, TOLERANCES, OR FEATURES MAY BE VIEWED GRAPHICALLY REGARDLESS OF DATUM REFERENCE.
ALL DIMENSIONS ARE IN INCHES
REFERENCE: 06294512
THIRD ANGLE PROJECTION
DO NOT SCALE
USE MATH DATA
NX

DELPHI
DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE
WARREN, OH

		DATE
DR		
APPD	RICARDO MARTINEZ	04JA07
APPD	FOOL RESENDIZ	05JA07
APPD	DIANE L. SCHROCK	10JA07
APPD		
APPD		

SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI (10NH900)

MATERIAL: SEE CHART

DRAWING NAME: TAXI TERM F P/C ED080-STD

DRAWING NUMBER: 08917430

SIZE	SCALE	FRAME NO	SHEET NO	STS	REV	FOR
A0	10:1	1 OF 1	1 OF 1	R	08	-