SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL [ ] DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	12
	LAST NO. USED	11

MISSING SYMBOLS
NO MISSING SYMBOL NUMBER

DWG STATUS DATE	STS	REC	N/P	CHG	ZONE	REVISION HISTORY	AUTH	DR	APVD 1	APVD 2
16JN93	R	01	-	-		REDRAWN TO PDI ALL PARTS - UPDATED PDM ATTRIBUTES	241764	LJA	FKV	JMP
14DEC3	R	02	-	-		12092347 - UPDATED PDM ATTRIBUTES	247376	MAD	MAD	JMP
21DEC3	R	03	-	-		ALL PARTS - UPDATED ECL COLUMN OF CHART	247759	FKV	FKV	JMP
10MR95	R	04	-	-		ALL PARTS - REVISED CARRIER DETAILS	265565	KCB	AUB	WTM
04AU10	R	05	-	-		ALL PARTS - MATERIAL SPEC WAS M3617465	411535	MH	JVM	MAC



TYPE 102
SAME AS TYPE 101
EXCEPT AS SHOWN



VIEW TO X-X

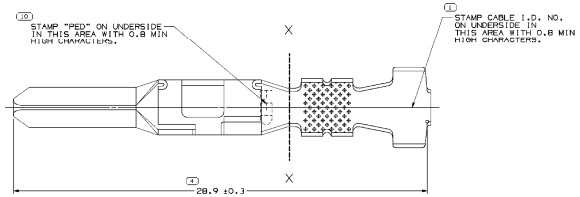

TYPE 101



VIEW TO X-X

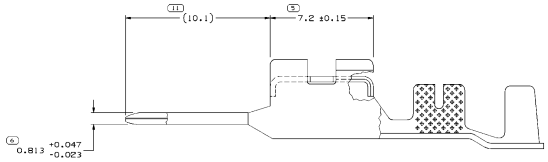

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. MATING TERMINAL 12084995 OR EQUIVALENT.
3. * DENOTES DIMENSIONS MADE AT CUT-OFF AND CRIMP DIE.
4. COIN ON INSULATION WING NOT REQUIRED WHEN MATERIAL THICKNESS IS 0.57 OR LESS.
5. MAXIMUM CURRENT CAPACITY IS 25 AMPS.
6. FOR SOLDERABILITY REQUIREMENTS SEE ESO-1503.

12092349	C4	-	-	M3617465 METL NONFERROUS C42500 1/2 HD	0.381 X 36.12	TWO 0.35	1.69-1.47	222	102	2.7	5.2
12092348	C4	-	-	M3617465 METL NONFERROUS C42500 1/2 HD	0.381 X 36.12	TWO 0.5	2.19-1.69	220	102	3.5	5.8
12092347	C5	-	-	M3617465 METL NONFERROUS C42500 1/2 HD	0.381 X 36.12	TWO 1-0.5	2.42-1.96	217	101	4.2	6.7
12092346	C4	-	-	M3617465 METL NONFERROUS C42500 1/2 HD	0.381 X 36.12	0.5-0.25	2.19-1.47	21	102	2.4	3.8
12092345	C4	-	-	M3617465 METL NONFERROUS C42500 1/2 HD	0.381 X 36.12	1-0.8	2.64-1.96	17	102	2.8	4.4
12092344	C4	-	-	M3617465 METL NONFERROUS C42500 1/2 HD	0.381 X 36.12	3-2	3.65-2.5	13	101	4	5.6
PART NO	REV	IN/P	STATUS	MAT'L SPEC	MAT'L SIZE	SIZE (MM²)	DIA	ID	TYPE	E	F
				PLATED		CABLE					

DWG TYPE	PART DRAWING
STYLE	
VALUE (UNF)	SCREW DWG

UNLESS OTHERWISE SPECIFIED
DIMENSIONS TO BE ACCORDANCE WITH ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED. ALL DIMENSIONS ARE TO BE CALCULATED MINIMUM & MAXIMUM LIMITS. ALL DIMENSIONS AND TOLERANCES AND RELATED DATUMS APPLY ONLY TO THE PART OR ASSEMBLY FORM AT THE LEVEL OF DETAIL SHOWN. ALL DIMENSIONS AND TOLERANCES TO BE CONSTRUED AS INDEPENDENT OF ANY OTHER DIMENSION OR TOLERANCE. ALL DIMENSIONS AND TOLERANCES APPLY AT 20°C. DELPHI SERVICES PROCEDURE DIMENSIONS BUT NO SHOULD SUPPORTED, SEE DELPHI SERVICES PROCEDURE.
ALL DIMENSIONS ARE IN MILLIMETERS

REFERENCE

THIRD ANGLE PROJECTION

DO NOT SCALE

USE MATH DATA

NX

PROCESS INSPECTION STANDARDS	
DIMENSIONS INCORDS IN I.D. INDICATE UNITS OR DEVIATIONS.	
DIMENSIONAL RANGE (MM)	SCOPE C
FROM 0	>12
TO 12	
TOLERANCE UNLESS OTHERWISE SPECIFIED (DIM)	
±0.2	
FINISH OR TOLERANCE (C)	

DELPHI

DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE
WARREN, OH

		DATE
DR		
APVD1	T. NADASKY	31MR99
APVD2	R.J. BLASKO	31MR99
APVD3	R. PETROSKY	31MR99
APVD4		
APVD5		

SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI (GMNSCS)

MATERIAL: SEE CHART

DRAWING NAME: TAXI TERM M ACT 280

DRAWING NUMBER: 12092343

SIZE	SCALE	TRANS NO	SHEET NO	QTY	REV	N/P
AD	10:1	1	1 OF 1	1	R 05	-