

WATER CONTROL WITH TOTAL SERENITY



GENSALT OT

1 ABSOLUTE BATHING COMFORT

Enjoy all the benefits of salt chlorination, which is gentler on the skin and more environmentally-friendly. With its **smart control, EXO iQ** ensures **automated and continuous water treatment**, providing you with optimal water quality at all times. Dive into your pool in complete safety and find essential information at a glance on **its new intuitive screen**. For total peace of mind, EXO iQ has **a long-lasting electrode and comes with an unconditional warranty**.



2 CENTRALISED SMART POOL CONTROL

Fully control the quality of your pool water by adding **“plug & play” modules** for automatic pH and chlorination regulation.

In addition to water quality, personalise your bathing experience via the chlorination unit and manage all your pool equipment such as **the filtration pump** (single or variable-speed), heating system, lighting (including the colour) and more.



3 BUILT-IN CONNECTIVITY

Thanks to **built-in Wi-Fi**, you have all the features of your pool at your fingertips, wherever you are, using the **Fluidra Pool application**. Simple and smart, it allows you to see and manage the settings for all your pool equipment remotely.



SPECIFICATIONS



Easy installation

In just 10 minutes, regardless of the environment, thanks to its patented Quick Fix system.




No Maintenance

Self-cleaning electrodes via reverse polarity.



Safe System

Automatic stop if there is no flow in the cell.



Shutter Mode

Automatic reduction of chlorine production when the pool's roller shutters are closed (adjustable to 0% or 20%).

RANGE DESCRIPTION

MODELS	GenSalt OT 10	GenSalt OT 18	GenSalt OT 25
Volume of water treated in a temperate climate (filtration: 8 h/day)	40 m ³	70 m ³	110 m ³
Nominal chlorine production	10 g/h	18 g/h	25 g/h
Power supply	60 W	100 W	140 W

TECHNICAL INFORMATION

User interface	TFT screen
Number of languages	13 languages
Operating mode(s)	Normal, Boost, Low (adjustable range: 0 to 30%)
Polarity reversal	Adjustable every 2 to 8 hours
Shutter mode	Automatic reduction of chlorine production when the pool's roller shutters are closed (adjustable to 0% or 20%).
Safety	<ul style="list-style-type: none"> • Temperature sensors: Chlorine production is lowered in case of cold water to protect the electrode • "Low minerals" indicator light: Reduced production to protect the electrode • "No flow" message: Production is interrupted as long as the conditions are not ideal • Mechanical flow sensor
Electric power / power supply	220-240 V / 50-60 Hz
Cell lifespan	10 000 h

Salt water chlorinators offer an automatic and **efficient disinfection solution**. They are easy to use, offer complete water treatment and reduce maintenance.

FOR WHICH TYPE OF POOLS?

1 ALL TYPES OF SWIMMING POOLS



2 POOLS UP TO 90M³
(TEMPERATE CLIMATE,
FILTRATION 8 HR/DAY)



ACCESSORIES INCLUDED IN THE PACK



Reducing bushes kit



Flow switch kit



Wall mounting kit




Temperature sensor kit

ASSOCIATED PRODUCTS



pH Link module (pH regulation)

This module automatically measures and regulates the water's pH. If necessary, corrective product is injected.

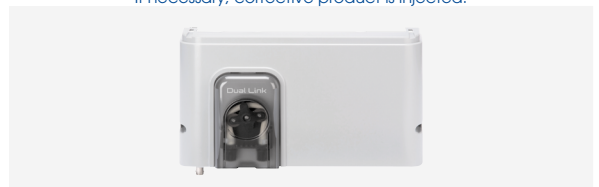

Dual Link module (pH and ORP regulation)

This module automatically measures and regulates the water's pH and chlorination (ORP method).

UNCONDITIONAL
GUARANTEE
UNCONDITIONAL