


S E550

TECHNICAL SHEETING

BLACK EPDM 50

FOR TECHNICAL APPLICATIONS EPDM 50 SHEETING

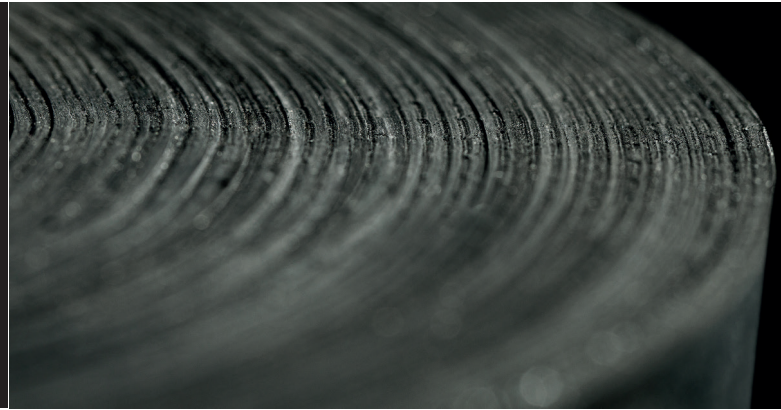

MECHANICAL & PHYSICAL PROPERTIES

MECHANICAL

Rubber Compound	EPDM
Rubber Color	Black
Density	1.10 g/cm ³ ±0.05
Hardness (ISO 48-4)	50±5 Shore A
Tensile strength (ISO 37)	≥9 MPa
Elongation at break (ISO 37)	≥450 %
Tear resistance (ISO 34-1)	≥23 N/mm
Compression set (ISO 815-1)	22h @ 70 °C : ≤35%

TEMPERATURE

Working temperature	-40/+115 °C
---------------------	-------------

AGEING

Δ Hardness (ISO 188)	70h @ 70 °C : ≤5 Shore A
Δ Tensile strength (ISO 188)	70h @ 70 °C : ≤-15%
Δ Elongation at break (ISO 188)	70h @ 70 °C : ≤-40%
Ozone resistance (ASTM D1149 type A)	200pphm, 48h, 38 °C, 20%: No crack

CHEMICAL RESISTANCE

Diluted acids and bases	Very good
Concentrated acids and bases	Good
Ozone	Very good
Oils and hydrocarbons	Non suitable

FEATURES

- 50 Shore A EPDM.

ADVANTAGES

- Very good resistance to ozone and ageing
- Excellent temperature resistance (-40/+115 °C)
- Excellent resistance to most inorganic or corrosive chemical products
- Highly resistant to mineral acids, detergents, phosphoric ethers, ketones, alcohols, or low molecular weight glycols
- Very good performance with hot water or high pressure steam
- Very good mechanical properties, especially tear resistance
- Matte finish to guarantee a good surface finished quality and to secure an easy unrolling.

APPLICATIONS

- Gaskets or washers cutting and manufacturing of pieces for general industrial purpose applications in contact with water, oxidizing and non oxidizing diluted acids.

MAINTENANCE RECOMMENDATION

- Always follow manufacturer warnings and instructions when using any cleaning product.

Asbestos
FREE

Halogen
FREE

RoHS
compliant

REACH
compliant

DIMENSIONS

Article number	Stock Situation	Thickness (mm)	Width (mm)	Length (mm)	Weight	Side 1 finish	Side 2 finish	Type of insertion	Number Of Insertions	Inner cardboard tube Ø mm
S705510201	STD STOCK	2	1400 ±2%	15000 ±2%	2,2	Matt	Smooth	-	0	80 mm
S705510301	STD STOCK	3	1400 ±2%	10000 ±2%	3,3	Matt	Smooth	-	0	80 mm
S705510401	STD NOT STOCK	4	1400 ±2%	10000 ±2%	4,4	Matt	Smooth	-	0	80 mm
SME55000005003	STD NOT STOCK	5	1400 ±2%	10000 ±2%	5,5	Matt	Smooth	-	0	80 mm
SME55000006001	STD NOT STOCK	6	1400 ±2%	10000 ±2%	6,6	Matt	Smooth	-	0	80 mm
SME55000008002	STD NOT STOCK	8	1400 ±2%	5000 ±2%	8,8	Matt	Smooth	-	0	
SME55000010003	STD NOT STOCK	10	1400 ±2%	5000 ±2%	11	Matt	Smooth	-	0	

IDENTIFICATION

Labelling	Self-adhesive label indicating product name, dimensions, area in m ² , nominal weight, and product code to allow product traceability. (94/62/EC - LDPE4)
Wrapping	Black polyethylene film.(94/62/EC - LDPE4)
Packaging	Thickness ≤6mm rolled on cardboard tube Ø 80mm. Thickness >6mm in roll.

Unless typographical error, information and figures of our technical datasheet are based on our experience and laboratory tests according to international standards. This data is intended to be used as a guideline only. Material performance depends on the conditions of use and the final application.