Datasheet

Suction cup F40-2 Nitrile-PVC, G1/4" male, with mesh filter and dual flow control valve

Article number: 0101574



- Suitable for flat objects.
- Good stability and little inherent movement.
- Recommended when the lifting force is parallel to the surface of the object.
- Cleats prevent thin, sensitive objects from being deformed and gives extra friction when the lifting force is parallel.

Technical data

i ecililicai data		
Description	Unit	Value
Suction cup shape	-	Flat
Application	-	Dry sheet metal
Suction cup design	-	Round
Characteristics	-	Dry sheet metal
Material	-	Nitrile-PVC (NPV)
Weight, min.	g	5.5
Suction cup model	-	F
Volume	cm³	4.8
Leakage flow, max.	NI/s	0.13
Height	mm	28
Outer diameter, min.	mm	42
Outer diameter, actuated	mm	43.7
Fitting size	-	1/4"
Fitting option	-	Dual flow control valve, Filter mesh
Fitting style	-	Male
Fitting type	-	G-thread
Valve restriction	mm	0.9
Suction cup model	-	F40-2
Movement, vertical max.	mm	1.8
Curve radius, min.	mm	52

Performance - Lifting forces

F40-2	Vertical (N)	Parallel (N)
20 -kPa	20	15
60 -kPa	40	25
90 -kPa	50	30

Material

Oil

Oxidation Petrol

Wear resistance

Weather and ozone

i laterial				
Name	Nitrile-PVC (NPV)			
Colour	Black			
Temperature, min. °C	0			
Temperature max. °C	90			
Hardness °Shore A	50			
Material resistance				
Alcohol	Good			
Concentrated acids	Fair			
Ethanol	n/a			
Hydrolysis	Good			
Methanol	n/a			


Excellent Good

Excellent

Excellent

Good

Dimensional drawings

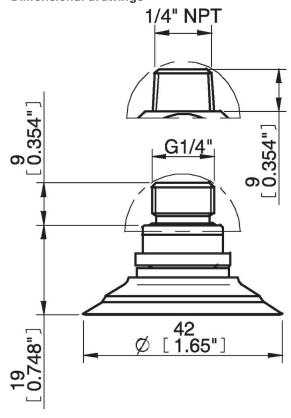

Values specified in this data sheet are tested at (unless otherwise stated):

- •Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- •Standard atmosphere (101.3 [29.9 inHg] \pm 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

0100261 | Fitting 5x1/8" NPSF female, 30-40

0101136 | Suction cup F40-2 Silicone

0101153 | Fitting 1/8" NPSF female, 30-40, with mesh filter

0101156 | Fitting 1/8" NPSF female, 30-40, with cone valve

3150197 | Fitting 1/8" NPSF female, 30-40, PA

3250005 | Fitting 1/8" NPSF female, 30-40

3250086 | Fitting G3/8" male, 30-40, with mesh filter

3250089 | Fitting 3/8" NPT male, with mesh filter

3250091 | Fitting G1/4" male, 30-40, with mesh filter

3250093 | Fitting 1/4" NPT male, with mesh filter

3251006 | Fitting 1/8" NPSF female, 30-40, with dual flow control valve

3251008 | Fitting 1/4" NPT male, with dual flow control valve

3251009 | Fitting G3/8" male, 30-40, with mesh and dual flow control valve

3251010 | Fitting 3/8" NPT male, with dual flow control valve

3251011 | Fitting 5x1/8" NPSF female, 30-40, with dual flow control valve

Spare parts

0101135 | Suction cup F40-2 Nitrile-PVC

3251007 | Fitting G1/4" male, 30-40, with mesh filter and dual flow control valve

