Datasheet

Suction cup B50MF Thermoelastic polyurethane, G1/4" male, with mesh filter

Article number: 0101683



- Suction cup of TPU, a mark free material that leaves no trace on the object being handled.
- Suitable for level adjustment.
- Lifting movement to separate small and thin objects.
- Only lightweight objects should be handled when the lifting force is parallel to the surface.

Technical data

	har an	
Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Mark Free
Suction cup design	-	Round
Characteristics	-	Mark free
Material	-	TPE
Weight, min.	g	19
Suction cup model	-	B-MF
Volume	cm ³	32
Height	mm	50
Outer diameter, min.	mm	55.1
Outer diameter, actuated	mm	61.1
Fitting size	-	1/4"
Fitting option	-	Filter mesh
Fitting style	-	Male
Fitting type	-	G-thread
Suction cup model	-	B50MF
Movement, vertical max.	mm	14.1
Curve radius, min.	mm	26


Performance - Lifting forces

B50MF	Vertical (N)	Parallel (N)
20 -kPa	30	23
60 -kPa	93	63
90 -kPa	136	97

Material

Platerial	
Name	Thermoplastic Polyurethane (TPE-U)
Colour	White transparent
Temperature, min. °C	-20
Temperature max. °C	80
Hardness °Shore A	81
Material resistance	
Alcohol	Good
Concentrated acids	Poor
Ethanol	n/a
Hydrolysis	Poor
Methanol	n/a
Oil	Excellent
Oxidation	Good
Petrol	Poor
Wear resistance	Excellent
Weather and ozone	Excellent

Dimensional drawings

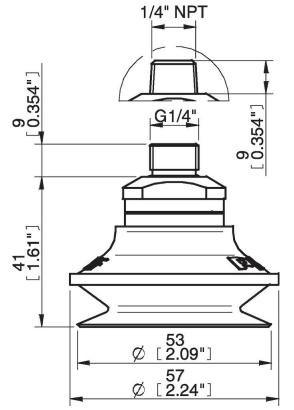

Values specified in this data sheet are tested at (unless otherwise stated):

•Room temperature (20°C [68°F] ± 3°C [5.5°F]).

- •Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- •Relative humidity 20-70%.
- •Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

0100262 | Fitting 5x1/8" NPSF female, 50

- 0101154 | Fitting 1/8" NPSF female, 50, with mesh filter
- 3250017 | Fitting 1/8" NPSF female, 50

3250087 | Fitting G3/8" male, 50, with mesh filter

- 3250090 | Fitting 3/8" NPT male, with mesh filter
- 3250094 | Fitting 1/4" NPT male, with mesh filter

3251012 | Fitting 1/8" NPSF female, 50, with dual flow control valve

3251013 | Fitting G1/4" male, with mesh filter and dual flow control valve

3251014 | Fitting 1/4" NPT male, with dual flow control valve

3251015 | Fitting G3/8" male, 50, with mesh filter and dual flow control valve

3251016 | Fitting 3/8" NPT male, with dual flow control valve

3251017 | Fitting 5x1/8" NPSF female, 50, with dual flow control valve

Spare parts

0101114 | Suction cup B50MF Thermoelastic polyurethane 3250092 | Fitting G1/4" male, 50, with mesh filter