

Suction cup U4 Chloroprene

Article number: 3150114

- Suitable for objects with flat or slightly curved surfaces.
- Also used for concave objects.



Technical data

Description	Unit	Value
Suction cup shape	-	Universal
Application	-	Dry sheet metal, Plastic injection molded parts
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Plastic injection molded parts
Material	-	Chloroprene (CR)
Weight, min.	g	0.08
Suction cup model	-	U
Volume	cm ³	0.03
Height	mm	6.1
Outer diameter, min.	mm	5
Fitting size	-	None
Fitting option	-	None
Fitting style	-	None
Fitting type	-	None
Suction cup model	-	U4
Movement, vertical max.	mm	0.2
Curve radius, min.	mm	3

Performance - Lifting forces

U4	Vertical (N)	Parallel (N)
20 -kPa	0.2	0.2
60 -kPa	0.9	0.8
90 -kPa	1.3	1

Material

Name	Chloroprene (CR) 50° Shore A
Colour	Black
Temperature, min. °C	-40
Temperature max. °C	110
Hardness °Shore A	50

Material resistance

Alcohol	Good
Concentrated acids	Poor
Ethanol	n/a
Hydrolysis	Good
Methanol	n/a
Oil	Fair
Oxidation	Good
Petrol	Fair
Wear resistance	Excellent

Weather and ozone


Good

Name

Chloroprene (CR) 50° Shore A

Dimensional drawings

Black

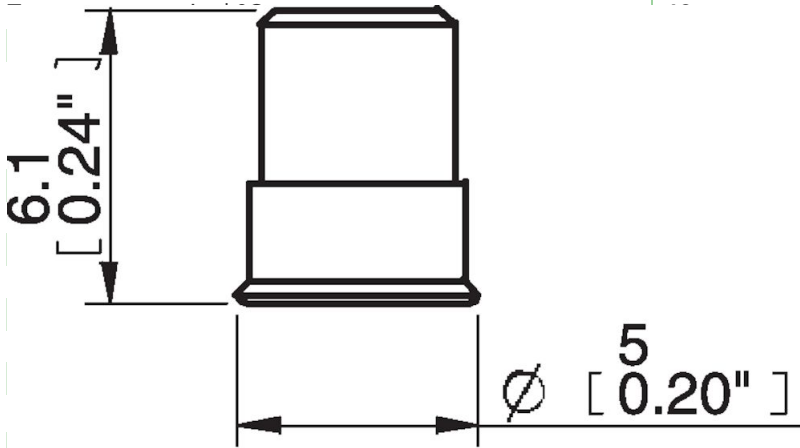

Weather and ozone

Good

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

3107031 | Fitting M5 male, 5–8